



CRYSTAL OSCILLATOR PROGRAMMABLE

SG - 8002 series

- Frequency range : 1 MHz to 125 MHz
- Supply voltage : 3.0 V / 3.3 V / 5.0 V
- Function : Output enable(OE) or Standby($\overline{ST}$)


- Short mass production lead time by PLL technology.
- SG-Writer available to purchase, please contact Epson Toyocom or local sales representative.



CE, LB, CA



Product Number (please contact us)

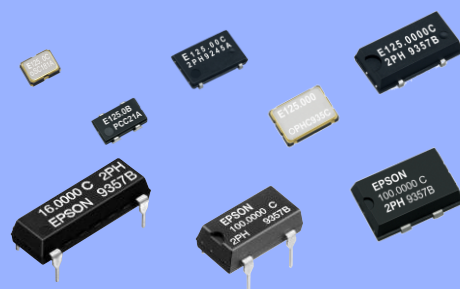

Specifications (characteristics)

Item	Symbol	Specifications *2			Conditions / Remarks
		PT / ST	PH / SH	PC / SC	
Output frequency range	f _o	1 MHz to 125 MHz		—	Vcc = 4.5 V to 5.5 V (except SG-8002LB)
		—	1 MHz to 80 MHz	—	Vcc = 4.5 V to 5.5 V (SG-8002LB only)
		—	—	1 MHz to 125 MHz	Vcc = 3.0 V to 3.6 V
		—	—	1 MHz to 66.7 MHz	Vcc = 2.7 V to 3.6 V
Supply voltage	Vcc	4.5 V to 5.5 V		2.7 V to 3.6 V	
Storage temperature	T _{stg}	-55 °C to +125 °C (SG-8002CA / JF / JA / DC / DB)			Store as bare product.
		-55 °C to +100 °C (SG-8002JC)			
		-40 °C to +125 °C (SG-8002CE / LB)			
Operating temperature	T _{use}	-20 °C to +70 °C / -40 °C to +85 °C			*1
Frequency tolerance	f _{tol}	B: ±50 × 10 ⁻⁶ , C: ±100 × 10 ⁻⁶			-20 °C to +70 °C
		M: ±100 × 10 ⁻⁶		M: ±100 × 10 ⁻⁶	-40 °C to +85 °C (except SG-8002JC) *3
		—	L:±50 × 10 ⁻⁶	L:±50 × 10 ⁻⁶	-40 °C to +85 °C (SG-8002LB only) *3
Current consumption	I _{cc}	40 mA Max. (SG-8002CE)		28 mA Max.	No load condition, Max. frequency
		—	30 mA Max. (SG-8002LB)		
		45 mA Max. (SG-8002CA / JF / JC / JA / DC / DB)			
Output disable current	I _{dis}	30 mA Max.		16 mA Max.	OE=GND (PT,PH,PC) (except SG-8002LB)
		—	25 mA Max.	16 mA Max.	OE=GND (PH,PC) (SG-8002LB only)
Stand-by current	I _{std}	50 µA Max.			ST =GND (ST,SH,SC)
Symmetry *1	SYM	40 % to 60 %	—		TTL load: 1.4 V, Max. load condition (except SG-8002LB)
		—	40 % to 60 %		CMOS load:50 % VCC level, Max. load condition (except SG-8002LB)
		—	40 % to 60 %	—	50 % Vcc, L _{CMOS} =15 pF, ≤80 MHz (SG-8002LB)
		—	—	40 % to 60 %	50 % Vcc, L _{CMOS} =15 pF, Vcc=3.0 V to 3.6 V, ≤125 MHz (SG-8002LB)
		—	—	40 % to 60 %	50 % Vcc, L _{CMOS} =15 pF, Vcc=2.7 V to 3.6 V, ≤66.7 MHz (SG-8002LB)
		45 % to 55 %		*1	
High output voltage	VOH	Vcc -0.4 V Min.			IOH=-16 mA (PT,ST,PH,SH) , -8 mA (PC,SC)
Low output voltage	VOL	0.4 V Max.			IOL=16 mA (PT,ST,PH,SH) , 8 mA (PC,SC)
Output load condition (TTL) *1	L _{TTL}	5 TTL Max.	—		Max. frequency and Max. Supply voltage (SG-8002CE / CA / JA / DC / DB)
		5 TTL Max.	—		f0 ≤ 90 MHz and Max. Supply voltage (SG-8002JF / JC)
Output load condition (CMOS) *1	L _{CMOS}	15 pF Max.			Max. frequency and Max. Supply voltage (SG-8002CE / JF / JC)
		—	15 pF Max.		Max. frequency and Max. Supply voltage (SG-8002LB)
		15 pF Max.	25 pF Max	15 pF Max.	Max. frequency and Max. Supply voltage (SG-8002CA / JA / DC / DB)
Output enable / disable input voltage	VIH	2.0 V Min.		70 % VCC Min.	OE terminal or ST terminal
	VIL	0.8 V Max.		20 % VCC Max.	
Rise / Fall time *1	tr/ tf	4 ns Max.	—		TTL load: 0.4 V to 2.4 V level (except SG-8002LB)
		—	3 ns Max.		CMOS load: 20 % VCC to 80 % VCC level
Start-up time	t _{str}	10 ms Max.			Time at minimum supply voltage to be 0 s
Frequency aging	f _{aging}	±5 × 10 ⁻⁶ / year Max.			+25 °C, VCC=5.0 V/ 3.3 V (PC,SC) First year

*1 Operating temperature, the available frequency, symmetry, output load conditions and rise/fall time, please refer to "Outline specifications" page.

*2 PLL-PLL connection & Jitter specification, please refer to "Jitter specifications and characteristics chart" page.

*3 Refer to "Outline specifications" (Frequency range) for "M" and "L" tolerance availability. Checking possible by the Frequency checking program.





External dimensions and Recommended footprint

(Unit:mm)


SG-8002CE

Ceramic SON 4pin 3.2x2.5x1.05 mm

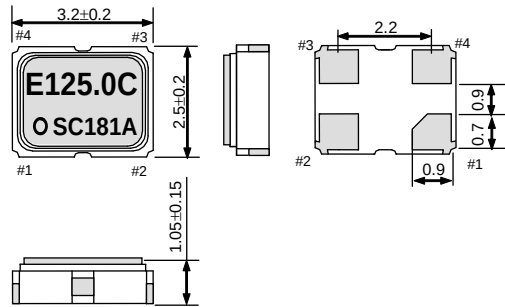


SG-8002LB

SOJ 4pin 5.0x3.2x1.2 mm


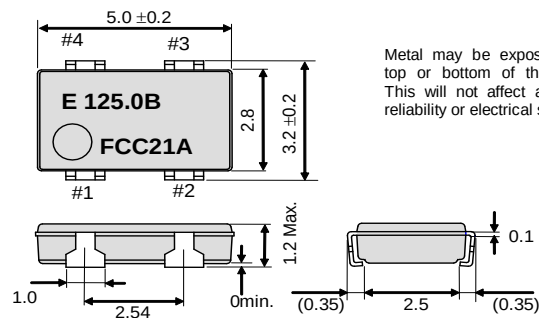


Metal may be exposed on the top or bottom of this product. This will not affect any quality, reliability or electrical spec.




SG-8002CA

Ceramic SON 4pin 7.0x5.0x1.4 mm

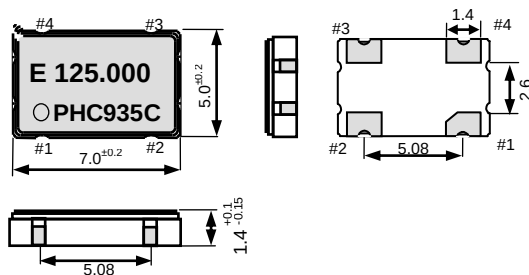


SG-8002JF

SOJ 4pin 7.1x5.1x1.5 mm

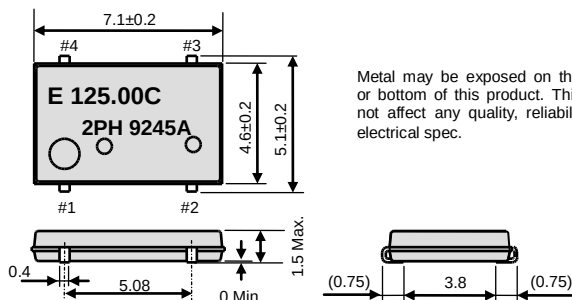

Metal may be exposed on the top or bottom of this product. This will not affect any quality, reliability or electrical spec.



Note.

OE Pin (PT, PH, PC)

OE Pin = "H" or "open": Specified frequency output.

OE Pin = "L": Output is high impedance.

ST Pin (ST, SH, SC)ST Pin = "H" or "open": Specified frequency output.

ST Pin = "L": Output is low level (weak pull - down), oscillation stops.

Pin map







Pin	Connection
1	OE or ST
2	GND
3	OUT
4	VCC

To maintain stable operation, provide a 0.01µF to 0.1µF by-pass capacitor at a location as near as possible to the power source terminal of the crystal product (between Vcc - GND).



External dimensions and Recommended footprint (Continued)

(Unit:mm)

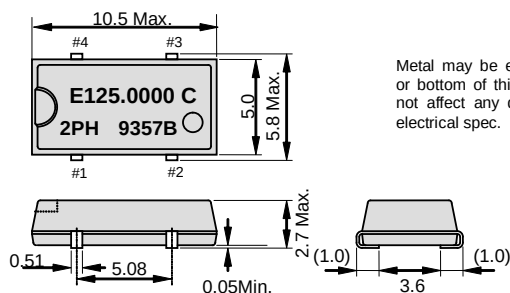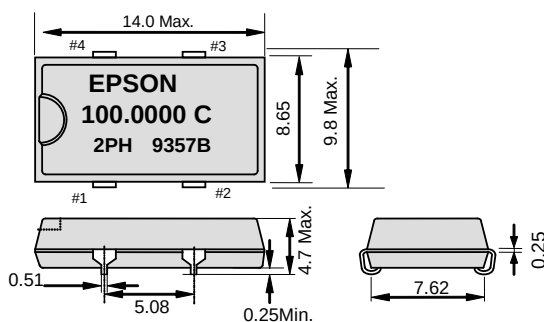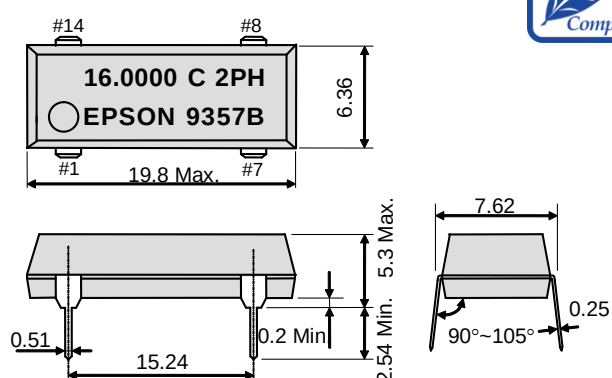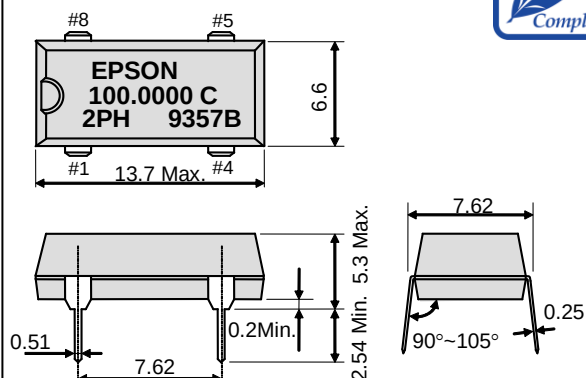SG-8002JC SOJ 4pin 10.5x5.8x2.7 mm Package and pin compatible with SG-636.**SG-8002JA** SOJ 4pin 14.0x9.8x4.7 mm Package and pin compatible with SG-615.**SG-8002DC** DIP half size**SG-8002DB** DIP full size

Note.

OE Pin (PT, PH, PC)

OE Pin = "H" or "open": Specified frequency output.

OE Pin = "L": Output is high impedance.

 $\overline{ST}$ Pin (ST, SH, SC) $\overline{ST}$ Pin = "H" or "open": Specified frequency output. $\overline{ST}$ Pin = "L": Output is low level (weak pull - down), oscillation stops.

Pin map

Pin	Connection
1	OE or $\overline{ST}$
2	GND
3	OUT
4	VCC

Pin map: SG-8002DC

Pin	Connection
1	OE or $\overline{ST}$
4	GND
5	OUT
8	VCC

Pin map: SG-8002DB

Pin	Connection
1	OE or $\overline{ST}$
7	GND
8	OUT
14	VCC

To maintain stable operation, provide a 0.01uF to 0.1uF by-pass capacitor at a location as near as possible to the power source terminal of the crystal product (between Vcc - GND).

Products number

(Please contact us for each product.)

SG-8002CE: Q3321CExxxxx00
 SG-8002LB: Q3323LBxxxxx00
 SG-8002CA: Q3309CAxxxxx00
 SG-8002JF: Q3308JFxxxxx00

SG-8002JC: Q3307JCx2xxxx00
 SG-8002JA: Q3306JAx2xxxx00
 SG-8002DC: Q3204DCx2xxxx00
 SG-8002DB: Q3203DBx2xxxx00

SG-8002 Series Outline of specifications

Model		Supply voltage	Operating temperature	Output load condition	Symmetry		Output rise time / Output fall time		
SG-8002CE	PT/ST	4.5 V to 5.5 V	-20 °C to +70 °C	5TTL+15pF	40 % to 60 % 45 % to 55 %	(1.4 V, L_TTL=5 TTL+15 pF, f0≤125 MHz) (1.4 V, L_TTL=5 TTL+15 pF, f0≤66.7 MHz)	2.0 ns Max.	(0.8 V to 2.0 V, L_TTL=Max.)	
			-40 °C to +85 °C		45 % to 55 %	(1.4 V, L_TTL=5 TTL+15 pF, f0≤27.0 MHz)	4.0 ns Max.	(0.4 V to 2.4 V, L_TTL=Max.)	
	PH/SH		-20 °C to +70 °C	15 pF (f0≤125 MHz) 25 pF (f0≤100 MHz)	40 % to 60 % 45 % to 55 %	(50 % VCC, L_CMOS=15 pF, f0≤125 MHz) (50 % VCC, L_CMOS=25 pF, f0≤66.7 MHz)	3.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS=Max.)	
			-40 °C to +85 °C	25 pF (f0≤27 MHz)	45 % to 55 %	(50 % VCC, L_CMOS=25 pF, f0≤27.0 MHz)			
	PC/SC	3.0 V to 3.6 V 2.7 V to 3.6 V	-40 °C to +85 °C	15 pF	40 % to 60 % 45 % to 55 %	(50 % VCC, L_CMOS=15 pF, f0≤125 MHz) (50 % VCC, L_CMOS=15 pF, f0≤40 MHz)	3.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS=Max.)	
					40 % to 60 %	(50 % VCC, L_CMOS=15 pF, f0≤66.7 MHz)			
SG-8002LB	PH/SH	4.5 V to 5.5 V	-40 °C to +85 °C	15 pF 25pF (f0≤50 MHz)	40 % to 60 % 45 % to 55 %	(50 % VCC, L_CMOS=15 pF, f0≤80 MHz) (50 % VCC, L_CMOS=25 pF, f0≤50 MHz)	3.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS=Max.)	
				PC/SC	3.0 V to 3.6 V 2.7 V to 3.6 V	-40 °C to +85 °C	15 pF	40 % to 60 % 45 % to 55 %	(50 % VCC, L_CMOS=15 pF, f0≤125 MHz) (50 % VCC, L_CMOS=15 pF, f0≤40 MHz)
		40 % to 60 %	(50 % VCC, L_CMOS=15 pF, f0≤66.7 MHz)						
	SG-8002JF	PT/ST	4.5 V to 5.5 V	-20 °C to +70 °C	5TTL+15 pF (f0≤90 MHz) 15 pF (f0≤125 MHz) 25 pF (f0≤66.7 MHz)	40 % to 60 % ↑ ↑ 45 % to 55 %	(1.4 V, L_TTL=5 TTL+15 pF, f0≤90 MHz) (1.4 V, L_CMOS=15 pF, f0≤125 MHz) (1.4 V, L_CMOS=25 pF, f0≤66.7 MHz) (1.4 V, L_TTL=5 TTL+15 pF, f0≤66.7 MHz)	2.0 ns Max.	(0.8 V to 2.0 V, L_CMOS≤25pF)
-40 °C to +85 °C					15 pF (f0≤40 MHz)	40 % to 60 %	(1.4 V, L_CMOS=15 pF, f0≤40 MHz)	4.0 ns Max.	(0.4 V to 2.4 V, L_CMOS or L_TTL=Max.)
PH/SH			-20 °C to +70 °C	15 pF (f0≤125 MHz) 25 pF (f0≤90 MHz) 50 pF (f0≤50 MHz)	40 % to 60 % ↑ ↑ 45 % to 55 %	(50 % VCC, L_CMOS=15 pF, f0≤125 MHz) (50 % VCC, L_CMOS=25 pF, f0≤90.0 MHz) (50 % VCC, L_CMOS=50 pF, f0≤50.0 MHz) (50 % VCC, L_CMOS=25 pF, f0≤66.7 MHz)	3.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS≤25pF)	
			-40 °C to +85 °C	15 pF (f0≤40 MHz)	40 % to 60 %	(50 % VCC, L_CMOS=15 pF, f0≤40 MHz)	4.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS=Max.)	
PC/SC		3.0 V to 3.6 V 2.7 V to 3.6 V	-40 °C to +85 °C	15 pF 30 pF (f0≤40 MHz)	40 % to 60 % 45 % to 55 %	(50 % VCC, CL=15 pF, f0≤125 MHz) (50 % VCC, CL=30 pF, f0≤40 MHz)	3.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS≤15pF)	
				15 pF	40 % to 60 %	(50 % VCC, CL=15 pF, f0≤66.7 MHz)	4.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS=Max.)	
SG-8002CA		PT/ST	4.5 V to 5.5 V	-20 °C to +70 °C	5TTL+15pF (f0≤125 MHz) 25 pF (f0≤66.7 MHz)	40 % to 60 % ↑ 45 % to 55 %	(1.4 V, L_TTL=5 TTL+15 pF, f0≤125 MHz) (1.4 V, L_CMOS=25 pF, f0≤66.7 MHz) (1.4 V, L_TTL=5 TTL+15 pF, f0≤66.7 MHz)	2.0 ns Max.	(0.8 V to 2.0 V, L_CMOS or L_TTL=Max.)
				-40 °C to +85 °C	5 TTL+15 pF (f0≤40 MHz) 15 pF (f0≤55 MHz)	40 % to 60 % 45 % to 55 %	(1.4 V, L_CMOS=15 pF, f0≤55.0 MHz) (1.4 V, L_TTL=5 TTL+15 pF, f0≤40.0 MHz)	4.0 ns Max.	(0.4 V to 2.4 V, L_CMOS or L_TTL=Max.)
SG-8002JA	PH/SH		-20 °C to +70 °C	25 pF (f0≤125 MHz) 50 pF (f0≤66.7 MHz)	40 % to 60 % ↑ 45 % to 55 %	(50 % VCC, L_CMOS=25 pF, f0≤125 MHz) (50 % VCC, L_CMOS=50 pF, f0≤66.7 MHz) (50 % VCC, L_CMOS=25 pF, f0≤66.7 MHz)	3.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS≤25pF)	
SG-8002DB			-40 °C to +85 °C	15 pF (f0≤55 MHz) 25 pF (f0≤40 MHz)	40 % to 60 % 45 % to 55 %	(50 % VCC, L_CMOS=15 pF, f0≤55.0 MHz) (50 % VCC, L_MOS=25 pF, f0≤40.0 MHz)	4.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS=Max.)	
SG-8002DC	PC/SC	3.0 V to 3.6 V 2.7 V to 3.6 V	-40 °C to +85 °C	15 pF 30 pF (f0≤40 MHz)	40 % to 60 % 45 % to 55 %	(50 % VCC, L_CMOS=15 pF, f0≤125 MHz) (50 % VCC, L_CMOS=30 pF, f0≤40 MHz)	3.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS≤15pF)	
15 pF				40 % to 60 %	(50 % VCC, L_CMOS=15 pF, f0≤66.7 MHz)	4.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS=Max.)		
SG-8002JC	PT/ST	4.5 V to 5.5 V	-20 °C to +70 °C	5TTL+15 pF (f0≤90 MHz) 15 pF (f0≤125 MHz) 25 pF (f0≤66.7 MHz)	40 % to 60 % ↑ ↑ 45 % to 55 %	(1.4 V, L_CMOS=15 pF, f0≤125 MHz) (1.4 V, L_TTL=5 TTL+15 pF, f0≤90.0 MHz) (1.4 V, L_CMOS=25 pF, f0≤66.7 MHz) (1.4 V, L_TTL=5 TTL+15 pF, f0≤66.7 MHz)	2.0 ns Max.	(0.8 V to 2.0 V, L_CMOS or L_TTL=Max.)	
				15 pF (f0≤125 MHz) 25 pF (f0≤90 MHz) 50 pF (f0≤66.7 MHz)	40 % to 60 % ↑ ↑ 45 % to 55 %	(50 % VCC, L_CMOS=15 pF, f0≤125 MHz) (50 % VCC, L_CMOS=25 pF, f0≤90 MHz) (50 % VCC, L_CMOS=50 pF, f0≤50 MHz) (50 % VCC, L_CMOS=25 pF, f0≤66.7 MHz)	3.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS≤25pF)	
	PH/SH		-20 °C to +70 °C	15 pF (f0≤125 MHz) 25 pF (f0≤90 MHz) 50 pF (f0≤66.7 MHz)	40 % to 60 % ↑ ↑ 45 % to 55 %	(50 % VCC, L_CMOS=15 pF, f0≤125 MHz) (50 % VCC, L_CMOS=25 pF, f0≤90 MHz) (50 % VCC, L_CMOS=50 pF, f0≤50 MHz) (50 % VCC, L_CMOS=25 pF, f0≤66.7 MHz)	4.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS=Max.)	
	PC/SC	3.0 V to 3.6 V 2.7 V to 3.6 V	-20 °C to +70 °C	15 pF 30 pF (f0≤40 MHz)	40 % to 60 % 45 % to 55 %	(50 % VCC, L_CMOS=15 pF, f0≤125 MHz) (50 % VCC, L_CMOS=30 pF, f0≤40 MHz)	3.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS≤15pF)	
				15 pF	40 % to 60 %	(50 % VCC, L_CMOS=15 pF, f0≤66.7 MHz)	4.0 ns Max.	(20 % VCC to 80 % VCC, L_CMOS=Max.)	

► TABLE OF FREQUENCY RANGE

Model		Supply voltage	Frequency	Frequency tolerance Operating Temperature
SG-8002CE	PT/ ST PH/ SH	4.5 V to 5.5 V	1.0 MHz to 125 MHz	B,C
			1.0 MHz to 27 MHz	M
	PC/SC	3.0 V to 3.6 V 2.7 V to 3.6 V	1.0 MHz to 125 MHz	B,C,M
			1.0 MHz to 66.7 MHz	
SG-8002LB	PH/ SH	4.5 V to 5.5 V	1.0 MHz to 80 MHz	B,C
			1.0 MHz to 27 MHz	M,L
	PC/ SC	3.0 V to 3.6 V 2.7 V to 3.6 V	1.0 MHz to 125 MHz	B,C,M,L
			1.0 MHz to 66.7 MHz	
SG-8002JF	PT/ ST PH/ SH	4.5 V to 5.5 V	1.0 MHz to 125 MHz	B,C
			1.0 MHz to 40 MHz	M
	PC/ SC	3.0 V to 3.6 V 2.7 V to 3.6 V	1.0 MHz to 125 MHz	B,C,M
			1.0 MHz to 66.7 MHz	
SG-8002CA SG-8002JA SG-8002DB SG-8002DC	PT/ ST PH/ SH	4.5 V to 5.5 V	1.0 MHz to 125 MHz	B,C
			1.0 MHz to 55 MHz	M
	PC/ SC	3.0 V to 3.6 V 2.7 V to 3.6 V	1.0 MHz to 125 MHz	B,C,M
			1.0 MHz to 66.7 MHz	
SG-8002JC	PT/ ST PH/ SH	4.5 V to 5.5 V	1.0 MHz to 125 MHz	B,C
			1.0 MHz to 125 MHz	
	PC/ SC	3.0 V to 3.6 V 2.7 V to 3.6 V	1.0 MHz to 125 MHz 1.0 MHz to 66.7 MHz	B,C

Frequency tolerance: B:±50×10⁻⁶ (-20 °C to +70 °C), C:±100×10⁻⁶ (-20 °C to +70 °C), M:±100×10⁻⁶ (-40 °C to +85 °C), L:±50×10⁻⁶ (-40 °C to +85 °C)



SG-8002 series Jitter specifications and characteristics chart

■ PLL-PLL connection

Because we use a PLL technology, there are a few cases that the jitter value will increase when SG-8002 is connected to another PLL-oscillator.

In our experience, we are unable to recommend these products for the applications such as telecom carrier use or analog video clock use. Please be careful checking in advance for these application (Jitter specification is Max.250 ps/CL=15 pF)

Jitter Specifications

Model	Supply Voltage	Jitter Item	Specifications	Remarks
PT / PH ST / SH	5.0 V $\pm$ 0.5 V	Cycle to cycle	150 ps Max.	33 MHz $\leq f_0 \leq$ 125 MHz, L_CMOS=15 pF
			200 ps Max.	1.0 MHz $\leq f_0 <$ 33 MHz, L_CMOS=15 pF
		Peak to peak	200 ps Max.	33 MHz $\leq f_0 \leq$ 125 MHz, L_CMOS=15 pF
			250 ps Max.	1.0 MHz $\leq f_0 <$ 33 MHz, L_CMOS=15 pF
SC / PC	3.3 V $\pm$ 0.3 V	Cycle to cycle	200 ps Max.	1.0 MHz $\leq f_0 \leq$ 125 MHz, L_CMOS=15 pF
		Peak to peak	250 ps Max.	1.0 MHz $\leq f_0 \leq$ 125 MHz, L_CMOS=15 pF

■ Remarks on noise management for power supply line

We do not recommend inserting filters or other devices in the power supply line as the counter measure of EMI noise reduction.

This device insertion might cause high-frequency impedance high in the power supply line and it affects oscillator stable drive.

When this measure is required, please evaluate circuitry and device behavior in the circuit and verify that it will not affect oscillation.

Start up time (0 % Vcc to 90 % Vcc) of power source should be more than 150 μ s.

■ SG-8002 series Characteristics chart

