


RV-3029-C3

Real Time Clock Module with I²C-Bus



100% leadfree, RoHS - compliant

DIMENSIONS

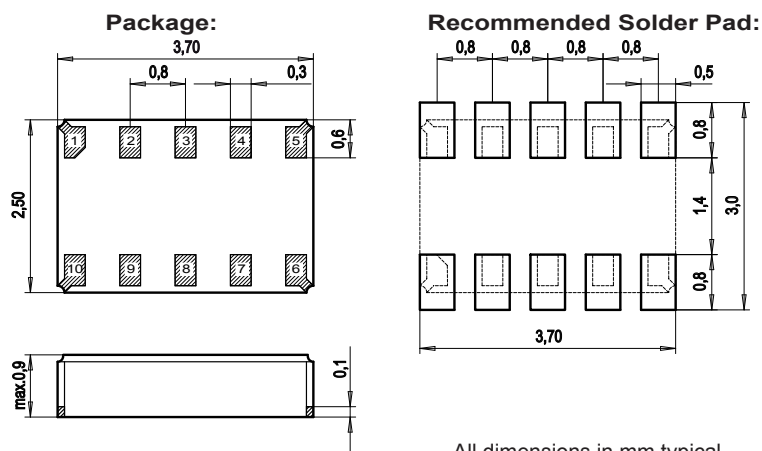

Extremely Accurate RTC Module with embedded Xtal.
I²C Interface
Temperature Compensation
Automotive qualified, according to AEC-Q200 Rev. C

Option A:	Calibrated	
Temperature	Time Deviation	
@ +25°C	± 0.26 s/day	± 3ppm
0°C to +50°C	± 0.35 s/day	± 4ppm
-10°C to +60°C	± 0.44 s/day	± 5ppm
-40°C to +85°C	± 0.52 s/day	± 6ppm
-40°C to +125°C	± 0.70 s/day	± 8ppm

Option B:	Default	
Temperature	Time Deviation	
@ +25°C	± 0.26 s/day	± 3ppm
0°C to +50°C	± 0.44 s/day	± 5ppm
-10°C to +60°C	± 0.87 s/day	±10ppm
-40°C to +85°C	± 2.17 s/day	±25ppm
-40°C to +125°C	± 2.60 s/day	±30ppm

BLOCKDIAGRAM:

DESCRIPTION:

The RV-3029-C3 is an ultra miniature Real-Time-Clock Module with embedded Crystal. This RTC has an I²C Bus (2-wire Serial-Interface) and offers temperature compensated time. The STC-Smart Temperature Compensation is calibrated in the factory and leads to a very high time-accuracy of ± 6ppm from -40°C to +85°C and ± 8ppm from -40°C to +125°C.


Beside standard RTC functions, it includes a Backup-Battery Input with internal switchover function, a programmable Trickle-charge circuitry, an integrated Temperature Sensor with digital-output and offers 8 Bytes RAM and 2 Bytes EEPROM for customer's application.

The calendar function tracks year and leap-year flags. The clock tracks second, minute and hour in 24-hour format. Programmable alarm setting and universal timer functions increase flexibility.

For pick-and-place equipment, the parts are available in 12 mm tape:

7" (178 mm) reel with 1'000 parts

7" (178 mm) reel with 3'000 parts

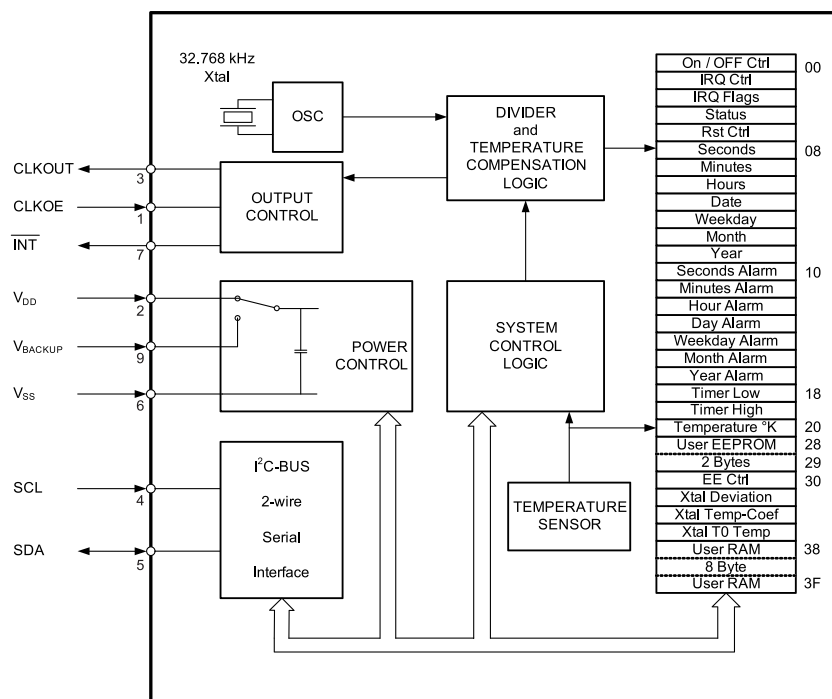

ELECTRICAL CHARACTERISTICS AT 25°C:

	Symbol	Condition	Min.	Typ.	Max	Unit
Supply voltage	V_{DD}	Time keeping	1.3		5.5	V
Supply voltage	V_{DD}	Temp. comp.	1.8		5.5	V
Current consumption	I_{DDO}	$V_{DD} = 3V$		800	1000	nA
CLKOUT frequency		Progr.	32.768/1024/32/1			Hz
Frequency Tolerance	$\Delta F/F$	@ 25°C		±10	±20	ppm
Freq.vs.Temp.	$\Delta F/F_{TOPR}$	$20 \leq T_0 \leq 30$	$-0.035 \text{ ppm}/^\circ\text{C}^2 (T - T_0)^2 \pm 10\%$			ppm
Aging first year	$\Delta F/F$	@ 25°C			± 3	ppm
Time accuracy Opt. A	$\Delta t/t$	@ 25°C			±0.26	s/day
		-40 to +85°C			±0.52	s/day
Time accuracy Opt. B	$\Delta t/t$	@ 25°C			±0.26	s/day
		-40 to +85°C			±2.17	s/day


ENVIRONMENTAL CHARACTERISTICS:

		Conditions	Max. Dev.
Storage temp. range		-55 to +125°C	
TA Operating temperature range		-40 to +85°C	
TB Extended oper. temp. range		-40 to +125°C	
Shock resistance	$\Delta F/F$	5000 g, 0.3 ms, 1/2 sine	± 5 ppm
Vibration resistance	$\Delta F/F$	20 g / 10–2000 Hz	± 5 ppm

PACKAGE, TERMINATIONS AND PROCESSING:

Package-Type	Termination	Processing
SON 10-pin	For SMD mounting Au plated pads	Reflow soldering 260°C/20 s max.

FREQUENCY TEMPERATURE CHARACTERISTICS:

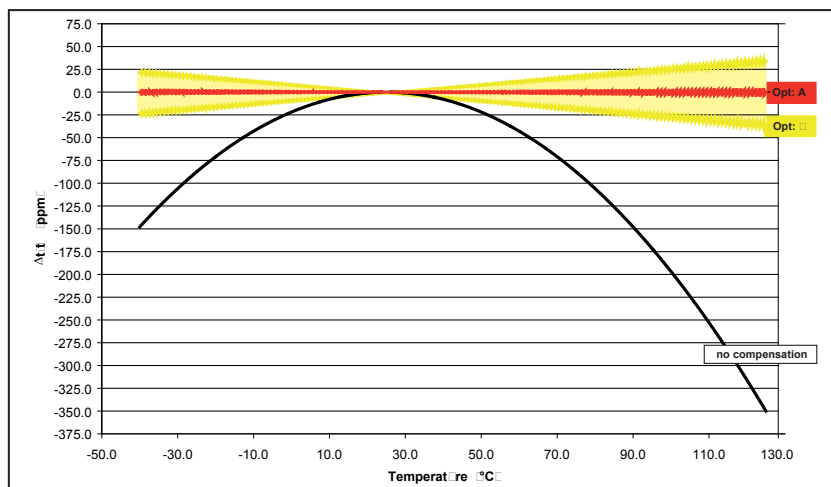

PIN CONNECTIONS TOP VIEW:

Pin	Connection
1	CLKOE CLK Output Enable
2	V_{DD} Supply Voltage
3	CLKOUT Clock Output
4	SCL Serial Clock Input
5	SDA Serial Data
6	V_{SS} Ground
7	INT Interrupt Output
9	V_{BACKUP} Backup Supply Voltage
8 / 10	N.C. not connected

Product Marking: 3029
Pin 1 Index: 10, 6, 5, 1

All specifications subject to change without notice.



Micro Crystal AG
Mühlestrasse 14
CH-2540 Grenchen
Switzerland

Tel. +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.com
www.microcrystal.com