

Silizium-Fotodiode mit V_{λ} Charakteristik
Silicon Photodiode with V_{λ} Characteristics
Lead (Pb) Free Product - RoHS Compliant
SFH 2430, SFH 2430 R



SFH 2430



SFH 2430 R

Wesentliche Merkmale

- Spektrale Empfindlichkeit angepasst an die Augenempfindlichkeit (V_{λ})
- Niedriger Temperaturkoeffizient der Fotoempfindlichkeit
- Gute Linearität
- DIL-Plastikbauform mit hoher Packungsdichte

Anwendungen

- Umgebungslichtsensor (Handy, Regensensor, Klimaanlagesteuerung)

Features

- Spectral sensitivity adapted to Human Eye Sensitivity (V_{λ})
- Low temperature coefficient of spectral sensitivity
- high linearity
- DIL plastic package with high packing density

Applications

- Ambient light sensor (Mobile phone, rain sensor, regulation of air conditioning)

Typ Type	Bestellnummer Ordering Code
SFH 2430	Q65110A2673
SFH 2430 R	Q65110A4739

Grenzwerte
Maximum Ratings

Bezeichnung Parameter	Symbol Symbol	Wert Value	Einheit Unit
Betriebs- und Lagertemperatur Operating and storage temperature range	$T_{op}; T_{stg}$	- 40 ... + 100	°C
Sperrspannung Reverse voltage	V_R	6	V
Verlustleistung, $T_A = 25\text{ °C}$ Total power dissipation	P_{tot}	150	mW

Kennwerte ($T_A = 25\text{ °C}$, Normlicht A, $T = 2856\text{ K}$)
Characteristics ($T_A = 25\text{ °C}$, standard light A, $T = 2856\text{ K}$)


Bezeichnung Parameter	Symbol Symbol	Wert Value	Einheit Unit
Fotoempfindlichkeit, $V_R = 5\text{ V}$ Spectral sensitivity	S	6.3 (>5)	nA/lx
Wellenlänge der max. Fotoempfindlichkeit Wavelength of max. sensitivity	$\lambda_{S\text{ max}}$	570	nm
Spektraler Bereich der Fotoempfindlichkeit $S = 10\%$ von S_{max} Spectral range of sensitivity $S = 10\%$ of S_{max}	λ	400 ... 900	nm
Bestrahlungsempfindliche Fläche Radiant sensitive area	A	7.00	mm ²
Abmessung der bestrahlungsempfindlichen Fläche Dimensions of radiant sensitive area	$L \times B$ $L \times W$	2.65 × 2.65	mm × mm
Halbwinkel Half angle	φ	± 60	Grad deg.
Dunkelstrom, $V_R = 5\text{ V}$ Dark current	I_R	0.1 (<5)	nA
Spektrale Fotoempfindlichkeit, $\lambda = 550\text{ nm}$ Spectral sensitivity	S_λ	0.17	A/W
Anstiegs- und Abfallzeit des Fotostromes Rise and fall time of the photocurrent $R_L = 50\text{ k}\Omega$; $V_R = 5\text{ V}$; $\lambda = 550\text{ nm}$	t_r, t_f	200	µs
Durchlaßspannung, $I_F = 100\text{ mA}$, $E = 0$ Forward voltage	V_F	1.2	V

Kennwerte ($T_A = 25\text{ °C}$, Normlicht A, $T = 2856\text{ K}$)


Characteristics ($T_A = 25\text{ °C}$, standard light A, $T = 2856\text{ K}$) (cont'd)

Bezeichnung Parameter	Symbol Symbol	Wert Value	Einheit Unit
Kapazität, $V_R = 0\text{ V}$, $f = 1\text{ MHz}$, $E = 0$ Capacitance	C_0	1000	pF
Temperaturkoeffizient von I_{SC} Temperature coefficient of I_{SC}	TC_I	0.16	%/K


Relative Spectral Sensitivity
 $S_{\text{rel}} = f(\lambda)$

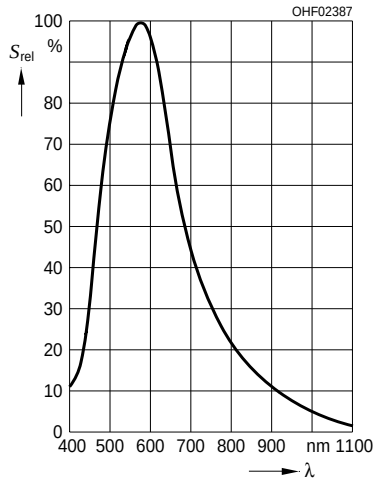


Photocurrent $I_P/I_{P(25^\circ\text{C})} = f(T_A)$
 $E_v = 1000 \text{ lx}, V_R = 5 \text{ V}$

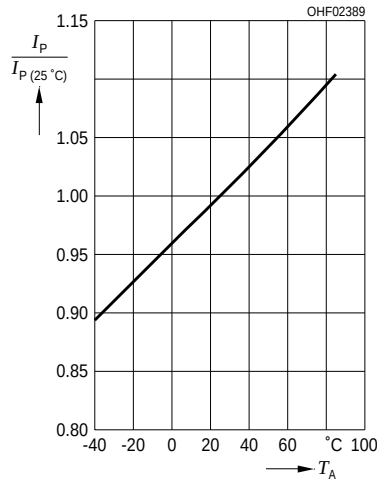


Total Power Dissipation
 $P_{\text{tot}} = f(T_A)$

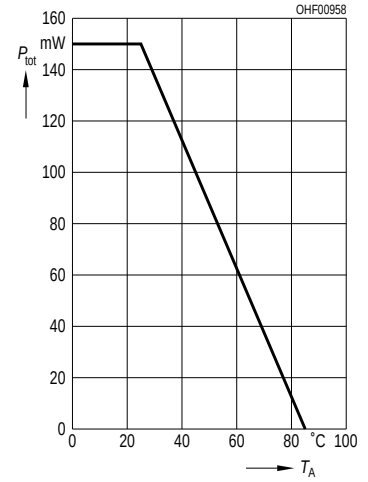


Dark Current
 $I_R = f(V_R), E = 0$

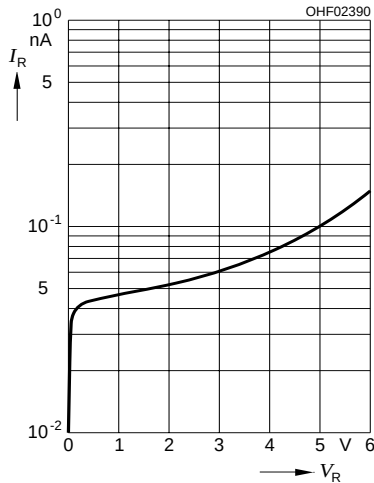

Capacitance
 $C = f(V_R), f = 1 \text{ MHz}, E = 0$

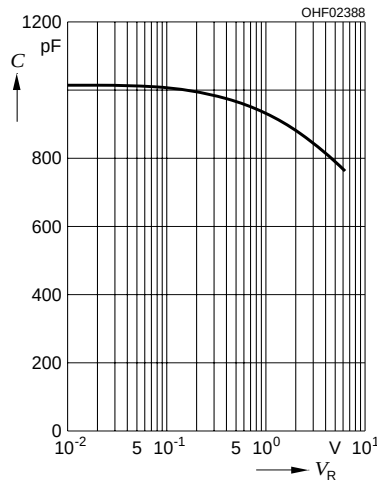


Directional Characteristics
 $S_{\text{rel}} = f(\varphi)$

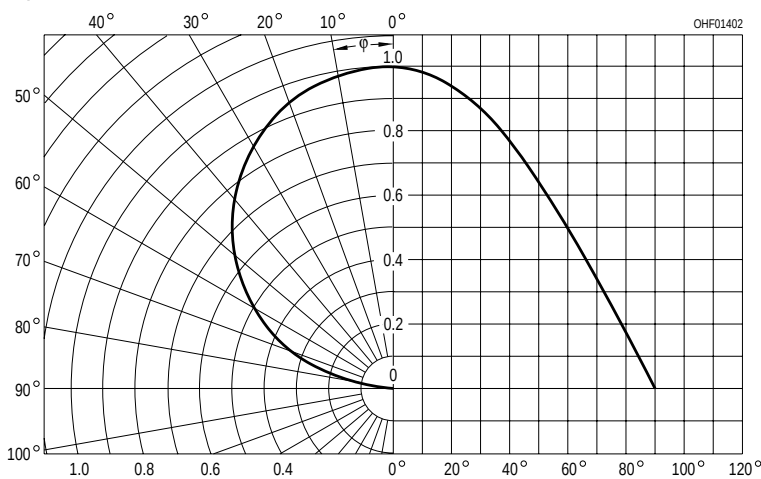


Maßzeichnung Package Outlines

SFH 2430

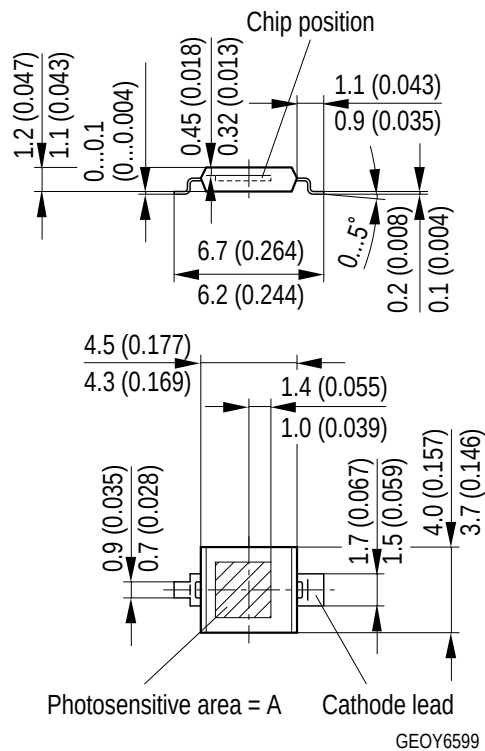


SFH 2430 R

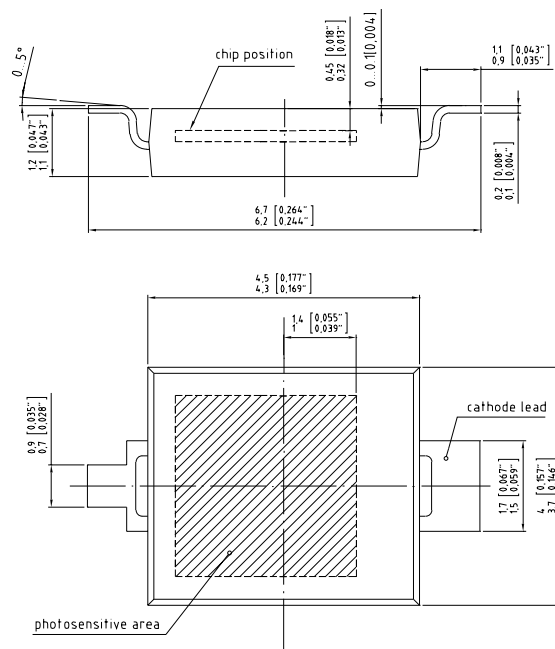

Maße in mm (inch) / Dimensions in mm (inch).

2008-12-16

5

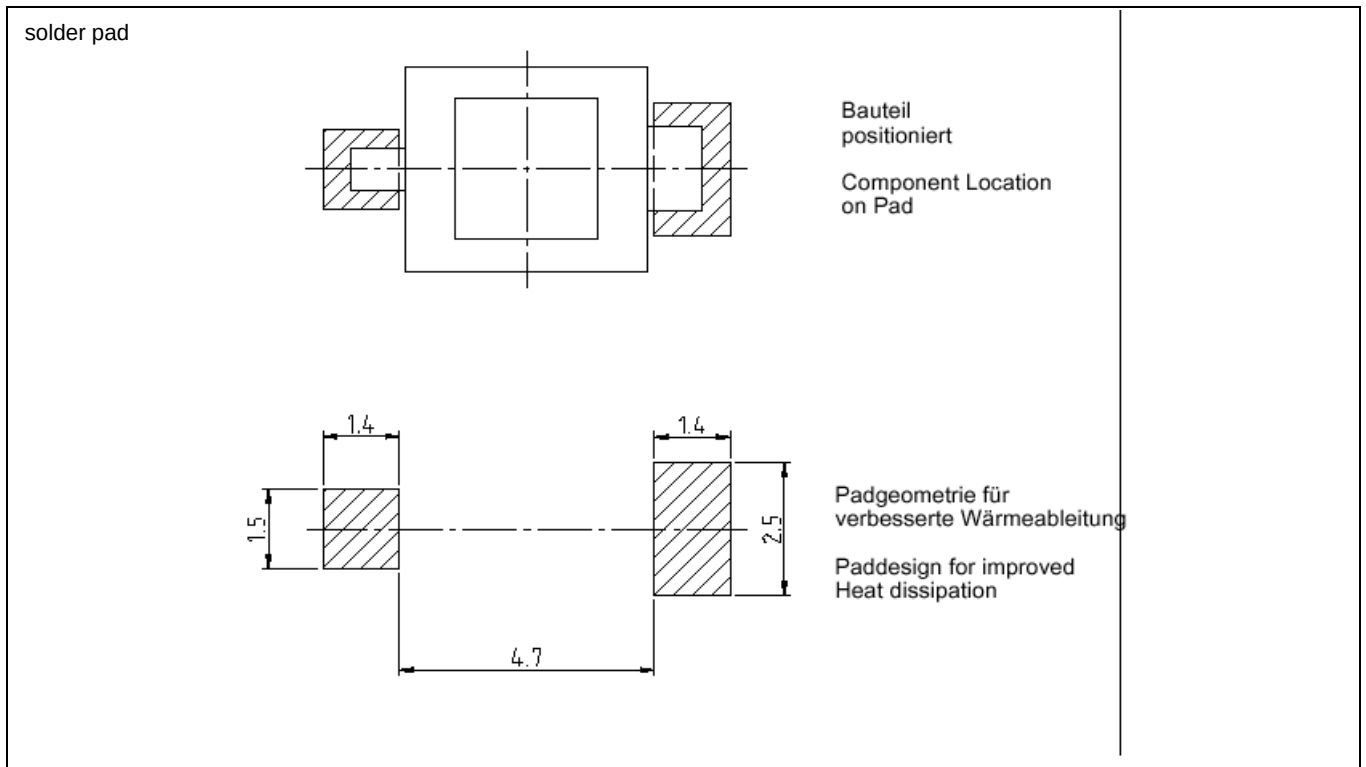

Maße in mm / Dimensions in mm


Lötbedingungen**Soldering Conditions****Reflow Lötprofil für bleifreies Löt****Reflow Soldering Profile for lead free soldering**

Vorbehandlung nach JEDEC Level 4

Preconditioning acc. to JEDEC Level 4

(nach J-STD-020C)

(acc. to J-STD-020C)

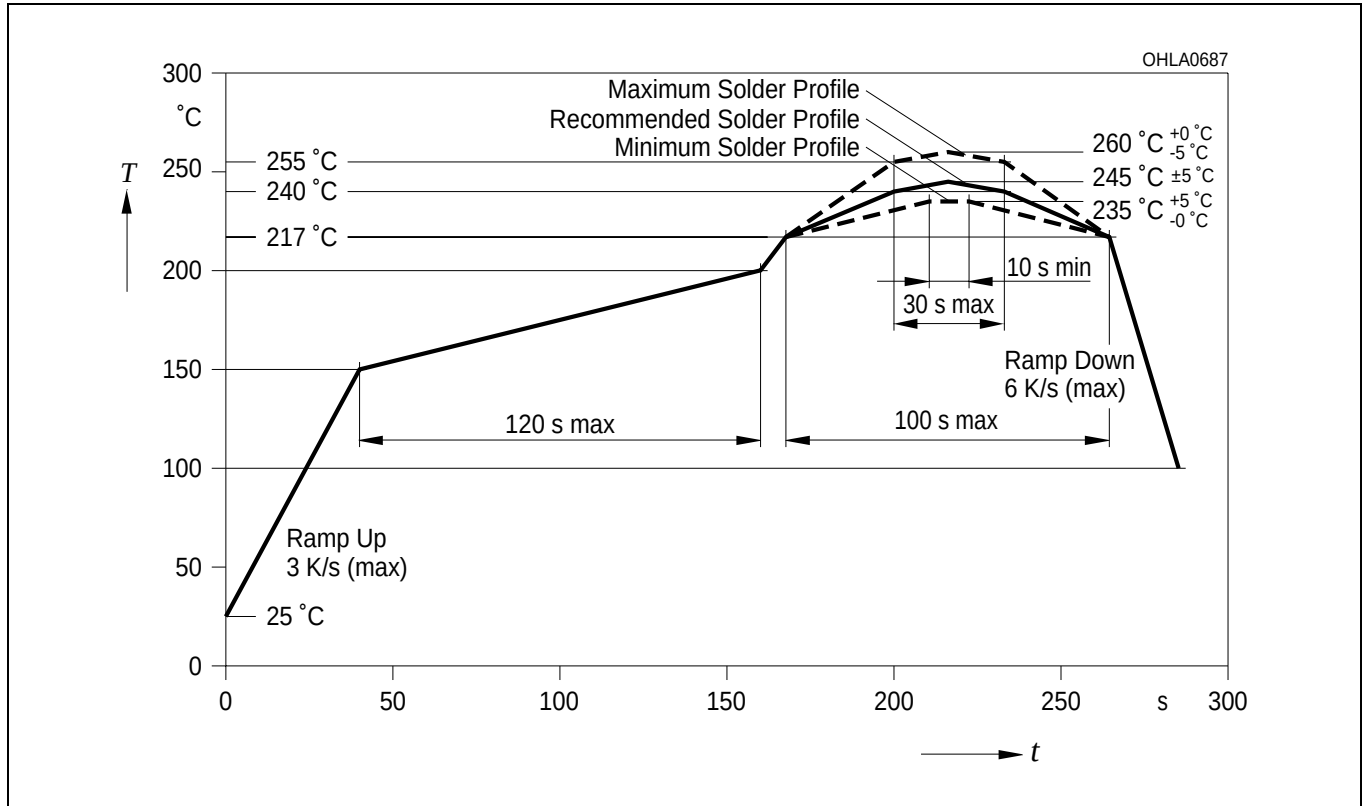

Published by
OSRAM Opto Semiconductors GmbH
Wernerwerkstrasse 2, D-93049 Regensburg
www.osram-os.com
© All Rights Reserved.

EU RoHS and China RoHS compliant product



此产品符合欧盟 RoHS 指令的要求；

按照中国的相关法规和标准，不含有毒有害物质或元素。

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances. For information on the types in question please contact our Sales Organization.

Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Components used in life-support devices or systems must be expressly authorized for such purpose! Critical components¹, may only be used in life-support devices or systems² with the express written approval of OSRAM OS.

¹ A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or effectiveness of that device or system.

² Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health of the user may be endangered.