


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENGLISH	METRIC	L ± [0,8]	W ± [0,3]	C ± [0,5]	M ± [0,8]	H ± [0,3]
EV14-6RB	#6	M3	.92 [23,4]	.31 [7,9]	.25 [6,4]	.76 [19,3]	.15 [3,8]
EV14-8RB	#8	M4	.92 [23,4]	.31 [7,9]	.25 [6,4]	.76 [19,3]	.17 [4,3]
EV14-10RB	#10	M5	.92 [23,4]	.31 [7,9]	.25 [6,4]	.76 [19,3]	.20 [5,1]
EV14-14RB	1/4"	M6	1.12 [28,5]	.46 [11,7]	.38 [9,7]	.89 [22,6]	.27 [6,9]
EV14-56RB	5/16"	M8	1.12 [28,5]	.46 [11,7]	.38 [9,7]	.89 [22,6]	.34 [8,6]

*RATED FOR 167°F [75°C] MAX TEMP. WITH CT-100A

NOTES:

- USED FOR:
 - 16-14 AWG [1,5-2,5 mm²] STRANDED COPPER WIRE
 - 221°F [105°C] MAX. OPERATING TEMPERATURE
 - 600V. MAX. BLDG WIRE
(1000 V. MAX. IN SIGNS, FIXTURES & LUMINAIRES)
- MATERIAL:
 - STAMPING: .032" [0,8] THK COPPER, TIN PLATED
 - HOUSING: VINYL, BLUE
- INSTALLATION TOOLS PANDUIT APPROVED:
 - UL APPROVED: CT-100A*, CT-600-A (CT-550CH)
CT-1550, CT-1551, CT-2500 (CT-2550CH)
 - PANDUIT APPROVED: CT-160, CT-260, CT-400
- WIRE STRIP LENGTH: 5/16" ^{+1/32}₋₀ [7,9mm ^{+0,8}₋₀]
- SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

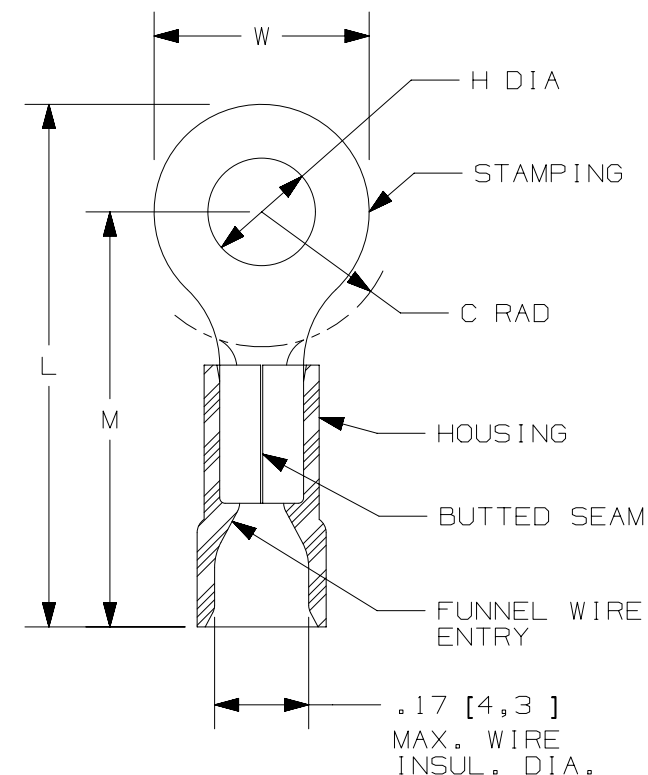

LISTED
587H
E52164



CERTIFIED
LR31212

TITLE			
STRONGHOLD RING TERMINALS VINYL INSULATED, BUTTED SEAM #16-14 AWG			
CUSTOMER DRAWING			
ITEM REVISION NAME		00123STG/00	
DATASET FILE NAME		00123STG_DC/00	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		.xxx ± .005 [.13] .xx ± .01 [.25] ANGLES ± 5°	
.x ± .1 [2.54] .xx ± .01 [.25]		THIRD ANGLE PROJECTION	
DRAWN BY JHNU		DATE 2/18	CHK TMR
SCALE N.T.S.		SHEET 1 OF 1	
MATERIAL: SEE NOTES		DRAWING NUMBER: SH41184	
REV		DATE	BY
2/18		JHNU	TMR
RGB		RELEASED	
00123SH		ECN	