

SWITCH-TOGGLE

CATALOG LISTING
11TW8 SERIES
CHART 2

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CAT. LIST.	RECOMMENDED LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	CIRCUIT WITH TOGGLE IN			ELECTRICAL DATA
		EXTREME POSITION KEYWAY SIDE (1-2)	CENTER	EXTREME POSITION OPPOSITE KEYWAY (2-3)	
3					
IITW8-1	A,B,D,E,F,G,H,J,K,L,M,N,P	ON	OFF	ON	CODE L117 5A-125 VAC 
IITW8-3	D, F, G	ON	NONE	ON	
IITW8-5	E, F, K, L, M, N	MOM ON	OFF	ON	
IITW8-7	E, L, N	MOM ON	OFF	MOM ON	
IITW8-8	F	MOM ON	NONE	ON	

"A" LOCKED IN THREE POSITIONS	"B" LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D" LOCKED OUT OF CENTER POSITION	"E" LOCKED IN CENTER POSITION	"F" LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)	"G" LOCKED IN EXTREME POSITION (KEYWAY SIDE)
"H" LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"J" LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K" LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"L" LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)	"M" LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N" LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)
"P" LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)	LOCKWASHER (PART NO. TS-10013) LOCKING RING (PART NO. EN-12449) HEX NUT (2) (PART NO. TL-10632)				

NOTE-

- ① FURNISHED UNASSEMBLED
- ② - TERMINALS ARE PLATED FOR SOLDERING
- ③ SUFFIX MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING
- ④ MATTE FINISH
- ⑤ - GOLD PLATED CONTACTS

SCALE 2:1



DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.03
TWO PLACE	(.00)	±.01
THREE PLACE	(.000)	±.000
ANGLES		±

WEIGHT .045 LB MAX

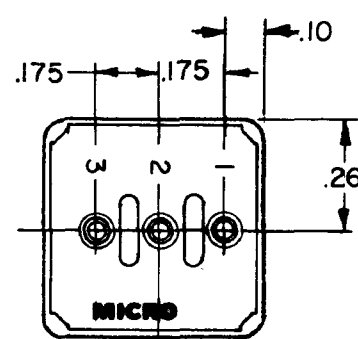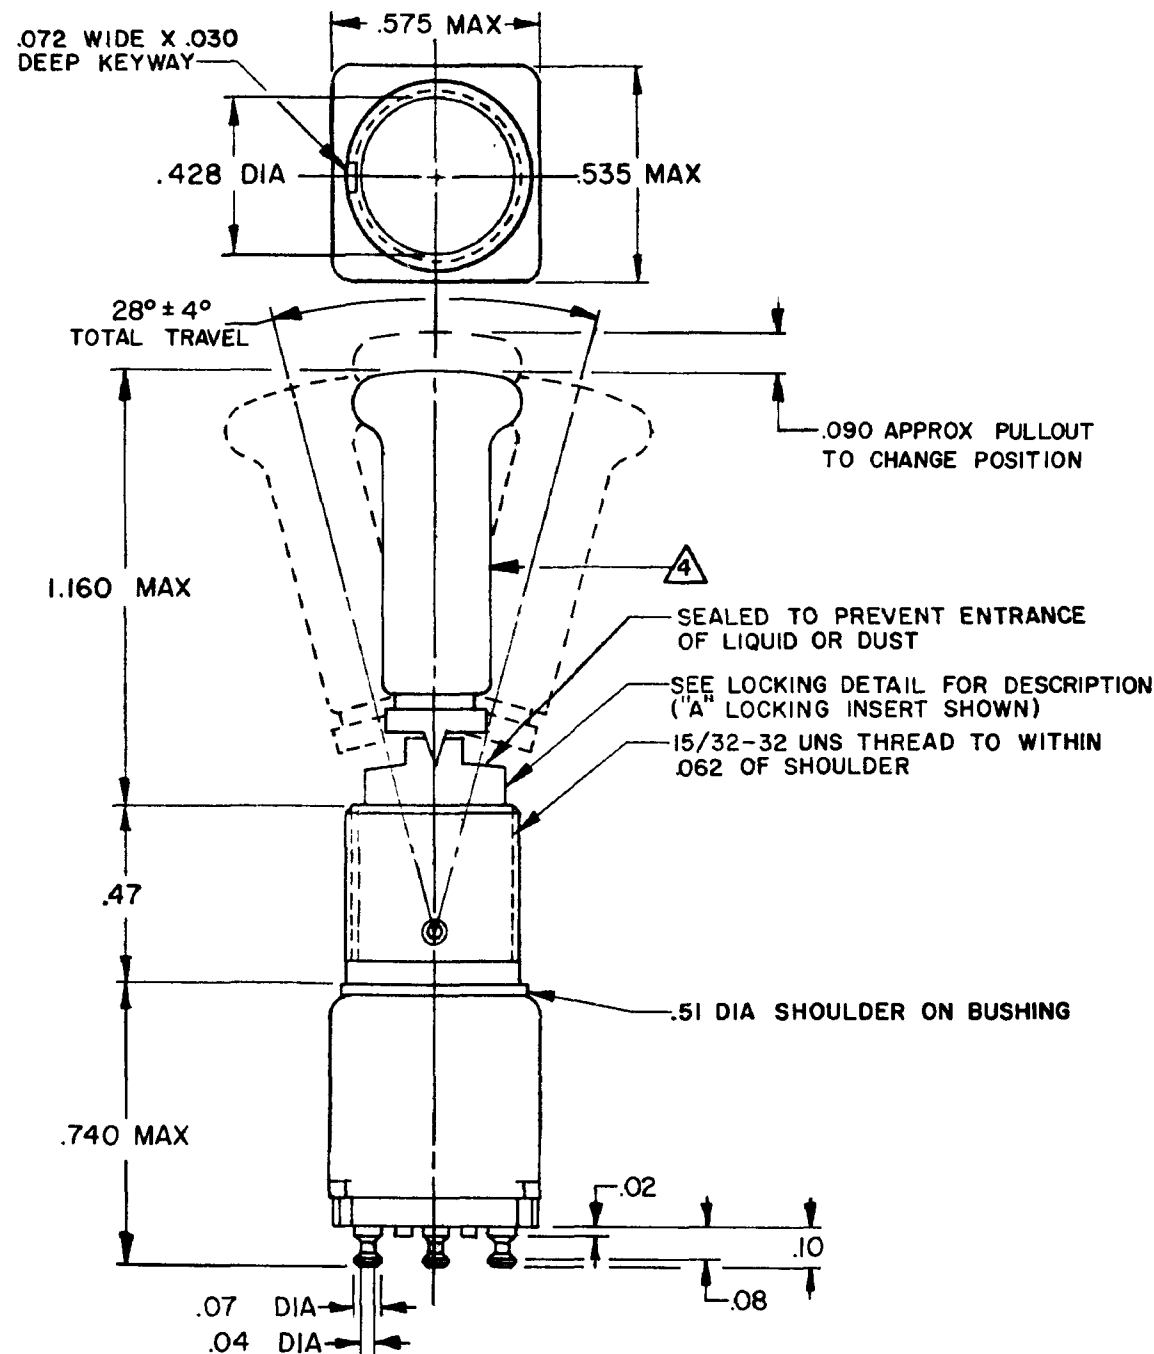

FORMTEK

**11TW8 SERIES
CHART 2**



**DRAWING
NUMBER**

6	
ISSUE	

--	--	--

REVISIONS
A PR-6519

18 MAY 77
B C050565

TRF
12 DEC 81
C C061252

J A P
12 MAR 87
D 0062939

TSK
24 FEB 88

E C083309
G J W
17 JAN 97

2

DRAWN

1