
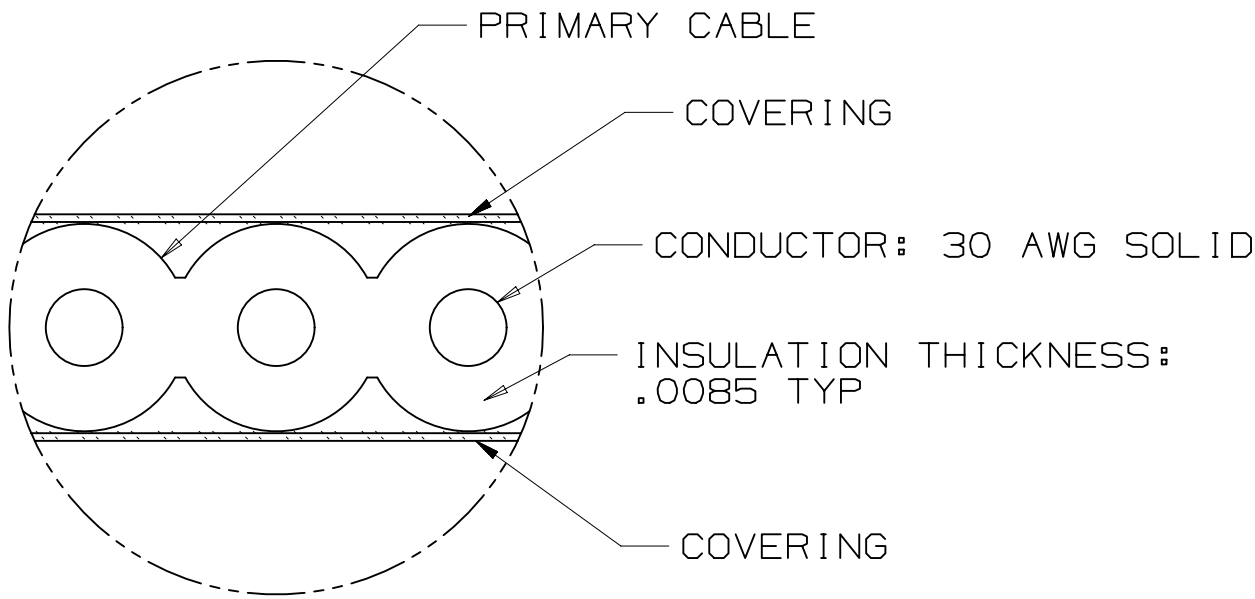


3M™ ROUND CONDUCTOR FLAT,
CONTROLLED IMPEDANCE CABLE, 7700 SERIES
.025" 30 AWG SOLID COVERED

PERFORMANCE:	
DIFFERENTIAL IMPEDANCE:	95 ± 5 Ohms
DIFFERENTIAL INSERTION LOSS:	< 3 dB/m AT 2.5 GHz TYP.
UL & CUL VOLTAGE RATING:	30V _{AC}
FLAMMABILITY RATING:	FT2, HORIZONTAL BURN
INSULATION RESISTANCE:	>1 × 10 ⁹ Ohms AT 500 VDC
WITHSTANDING VOLTAGE:	750VAC _{RMS} AT SEA LEVEL
OPERATING TEMPERATURE:	-20° C TO +80° C
UL & CUL TEMPERATURE RATING:	+80° C

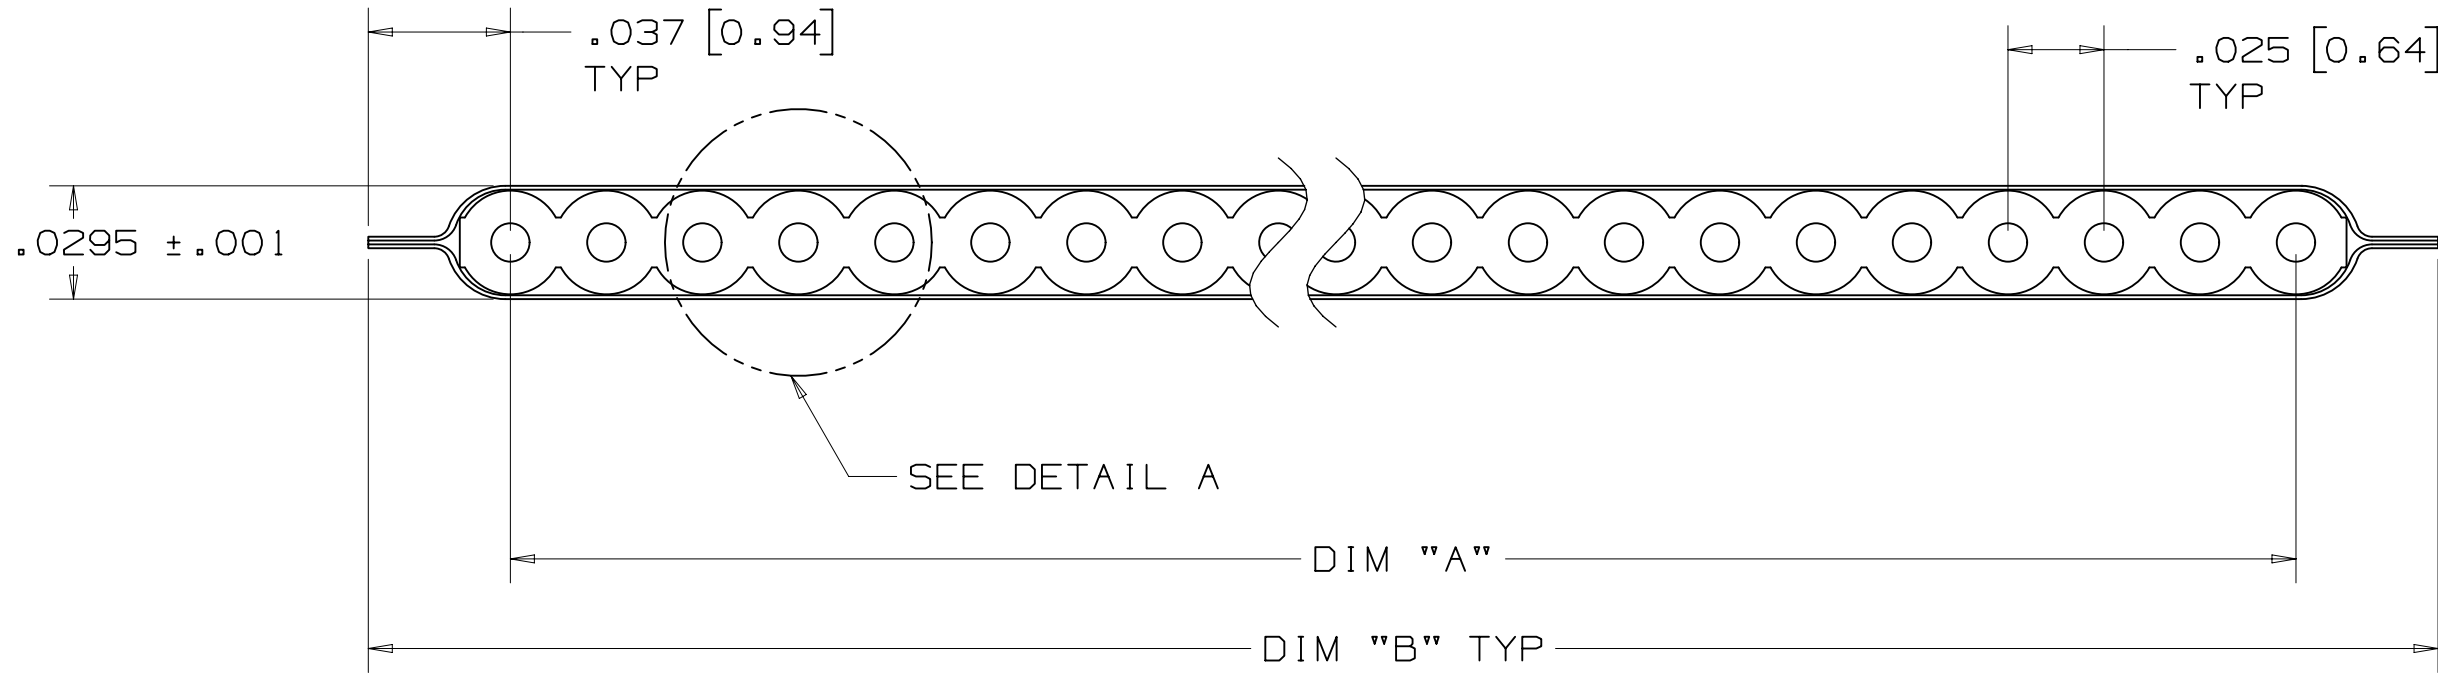

DETAIL A
SCALE 40:1

TABLE 1		
NUMBER OF CONDUCTORS	DIM. "A"	DIM. "B" ± .010
10	.225 ± .006 [5.72 ± 0.15]	0.300 [7.62]
14	.325 ± .006 [8.26 ± 0.15]	0.400 [10.16]
16	.375 ± .006 [9.53 ± 0.15]	0.450 [11.43]
20	.475 ± .006 [12.07 ± 0.15]	0.550 [13.97]
30	.725 ± .009 [18.42 ± 0.23]	0.800 [20.32]
50	1.225 ± .009 [31.12 ± 0.23]	1.300 [33.02]
100	2.475 ± .015 [62.87 ± 0.38]	2.550 [64.77]

ORDERING INFORMATION

7700/XX XX
PRIMARY CABLE
0: 30 AWG SOLID 0.025" PITCH
BLANK: STANDARD
SF: SPLICE FREE
NUMBER OF CONDUCTORS:
(SEE TABLE 1)


3M ELECTRONICS MATERIALS SOLUTIONS DIVISION
INTERCONNECT SOLUTIONS
<http://www.3m.com/Interconnect>

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

UL
UL FILE NO: E42769

DIMENSIONS: INCHES [MM]
[MM] IS REF ONLY

DESIGN REFERENCE		NEXT ASSEMBLY	
ACCESS CODES			
DIVISION		DIVISION CODE	
DO NOT SCALE DRAWING	SCALE 20 1	TOLERANCES EXCEPT AS NOTED	
THIRD ANGLE PROJECTION		INCHES 0 ± .1 .00 ± .02 .000 ± .005 .0000 ± .0002	
INTERPRET PER ASME Y14.5 - 2009		MILLIMETERS 0 ± .0 ± .00 ± .000 ±	
MAX SURFACE ROUGHNESS 125	<input type="checkbox"/> ALL SURFACES <input checked="" type="checkbox"/> MARKED ONLY	ANGLES ± 1°	

C	74293	JUN 14, 2017 PRODUCT LAUNCH	SBC	FR
B	72021	FEB 28, 2017 UPDATED TO NEW DESIGN	SBC	JV
A	69905	SEP 20, 2016 WORK REQUEST 12281 INITIAL RELEASE	LDS	SBC
REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
DRFT	L SCHMIDT	DATE AUG 23, 2016	MFG	DATE
CHKD	S CLATANOFF	DATE SEP 13, 2016	APPVL	DATE
		© 3M COPYRIGHT 2017 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.		
3M Center St. Paul, MN 55144				
TITLE ROUND CONDUCTOR FLAT, CNTRL IMPEDANCE 7700 SERIES .025 CABLE				
CAGE NUMBER	SIZE	DRAWING NO.	REV.	
	C	78-5100-2667-3	C	
MODEL		DET. LISTS	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	SHT 1 OF 2

NOTES

- MATERIALS:
CONDUCTORS: 30 AWG SOLID TIN
PLATED COPPER
INSULATION: POLYOLEFIN
COVERING: ALUMINUM FOIL & POLYESTER
- EXAMPLE OF A DIFFERENTIAL PAIR PINOUT
USING 3M™ RIBBON CABLE SOCKET,
.05 X .05 PITCH, 451 SERIES IDC
CONNECTOR, P/N: 45114-0X00 XX:
GGSSGGSSGGSSGG
NOTE: EDGE WIRES ARE DESIGNATED
AS GROUNDS.
- CABLE PRINT CODE:
77XX/XX 30 AWG TIN RUN# ID#
- BEFORE TERMINATING TO AN IDC
CONNECTOR, COVERING MUST BE REMOVED
TO PREVENT IDC SHORTING TO FOIL.
- AVAILABLE IN STANDARD 100 FT. PLEASE
SPECIFY WHEN ORDERING. PLEASE
CONTACT YOUR LOCAL 3M SALES
REPRESENTATIVE FOR ADDITIONAL
CONDUCTOR COUNTS.
- THE SURFACE OF THE RIBBON CABLE HAS
A METALLIC APPEARANCE BUT IS NOT
CONDUCTIVE. THERE IS A TRANSLUCENT
POLYESTER OUTER LAYER OVER AN
ALUMINUM FOIL LAYER, WHICH GIVES
THIS APPEARANCE.
- THE CABLE CONSTRUCTION HAS A THIN
CONDUCTIVE ALUMINUM LAYER AT EACH
EDGE. USER SHOULD EVALUATE ITS USE
IN THEIR APPLICATION AND, IF
NECESSARY, INSULATING TAPE MAY BE
APPLIED TO COVER THE ALUMINUM LAYER,
AS USER DEEMS APPROPRIATE.
- REGULATORY INFORMATION: ROHS
COMPLIANT. VISIT WWW.3M.COM/REGS FOR
COMPLIANCE INFORMATION.

78-5100-2667-3
DRAWING NUMBER

C
REVISION

B

A

3M™ ROUND CONDUCTOR FLAT,
CONTROLLED IMPEDANCE CABLE, 7700 SERIES
.025" 30 AWG SOLID COVERED

Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.


3M ELECTRONICS MATERIALS SOLUTIONS DIVISION
INTERCONNECT SOLUTIONS
<http://www.3m.com/Interconnect>

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

C	74293	JUN 14,2017 PRODUCT LAUNCH	SBC	FR
B	72021	FEB 28,2017 UPDATED TO NEW DESIGN	SBC	JV
A	69905	SEP 20,2016 WORK REQUEST 12281 INITIAL RELEASE	LDS	SBC

REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
DRFT	L	SCHMIDT	DATE	AUG 23,2016
CHKD	S	CLATANOFF	DATE	SEP 13,2016

DIVISION	DIVISION CODE
DO NOT SCALE DRAWING	SCALE 1/1
THIRD ANGLE PROJECTION	TOLERANCES EXCEPT AS NOTED
INTERPRET PER ASME Y14.5 - 2009	INCHES .0 ± .1 .00 ± .02 .000 ± .005 .0000 ± .0002
MAX SURFACE ROUGHNESS 125	MILLIMETERS 0 ± .0 .00 ± .000
ALL SURFACES MARKED ONLY	ANGLES ±1°



3M Center
St. Paul,
MN 55144

© 3M COPYRIGHT 2017
This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.

TITLE		
ROUND CONDUCTOR FLAT, CNTRL IMPEDANCE 7700 SERIES .025 CABLE		
CAGE NUMBER	SIZE	DRAWING NO.
C		78-5100-2667-3
MODEL	DET. LISTS	YES NO
		SHT 2 OF 2

REV.	C
------	---