

6

5

4

3

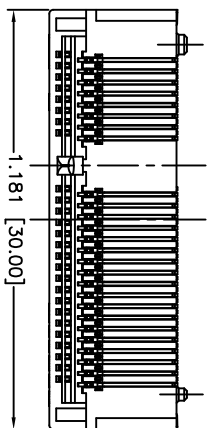
2

1

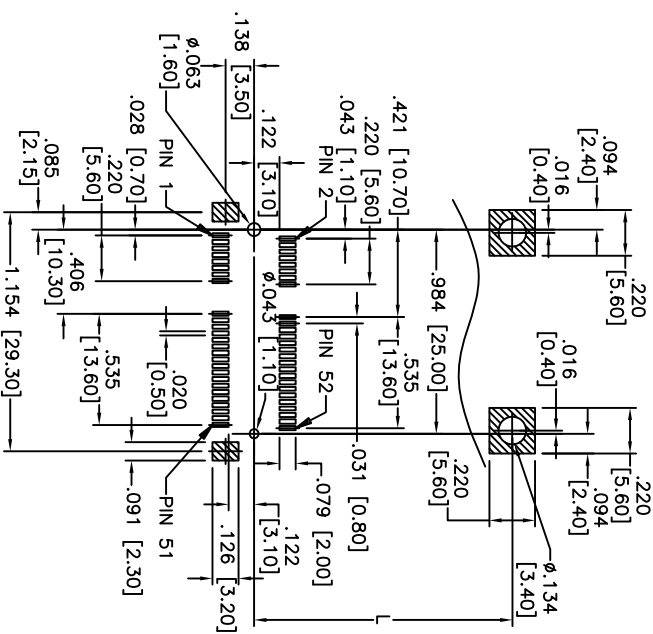
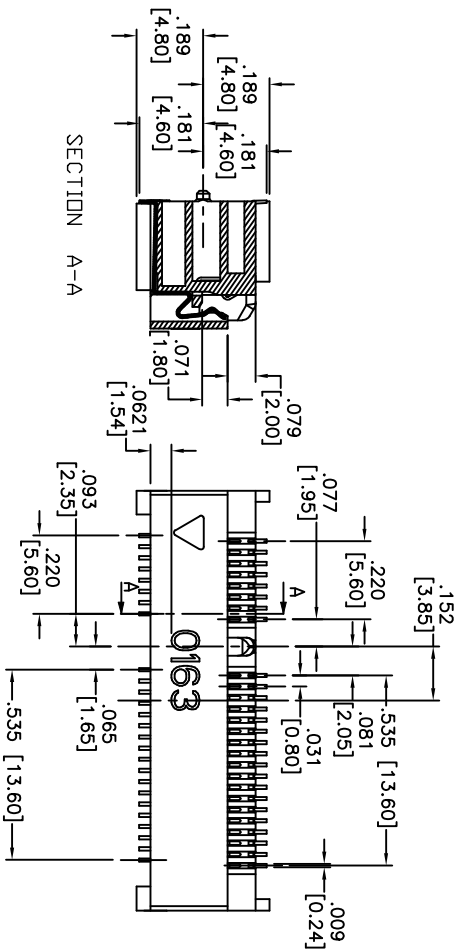
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/28/12	
A		REVISED LAYOUT DIM.	7/10/14	AY/NP



MODULE SIZE	DIM L
HALF SIZE	.941 [23.90]
FULL SIZE	1.892 [48.05]

**SPECIFICATIONS:****Material:**

Insulator: Hi-Temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Hold down: Brass: tin plated

Plating:

Gold flash over Nickel underplate on contact area, Matte Tin over Nickel underplate on Solder tails

Electrical:

Rating Current: 0.3A(Max.)/(1PIN)

Rating Voltage: 25V AC

Contact Resistance: 30 mΩ max

Insulation resistance: 500 MΩ min

Durability: 50 mating cycles

Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +90°C

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

ADAM TECH909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710MINI PCI EXPRESS CARD CONNECTOR, 52 PIN,
SMT, VARIOUS HEIGHTS, TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES				Holes			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .015	ØXX	± .010
.XXX	± .015	ØXXX	± .010	.XXX	± .010	ØXXX	± .010
APPROVALS				DATE			
DRAWN	AY		12/28/12				
CHECKED	CC		12/28/12				
APPROVED							
REF: S00153T				SCALE: NTS			
SIZE				PART NO.			
X				MPE-D-62-R-SMT-9.2-T/R			
				REV. A			

A

B

C

D

A

B

C

D