








REFERENCE DRAWING

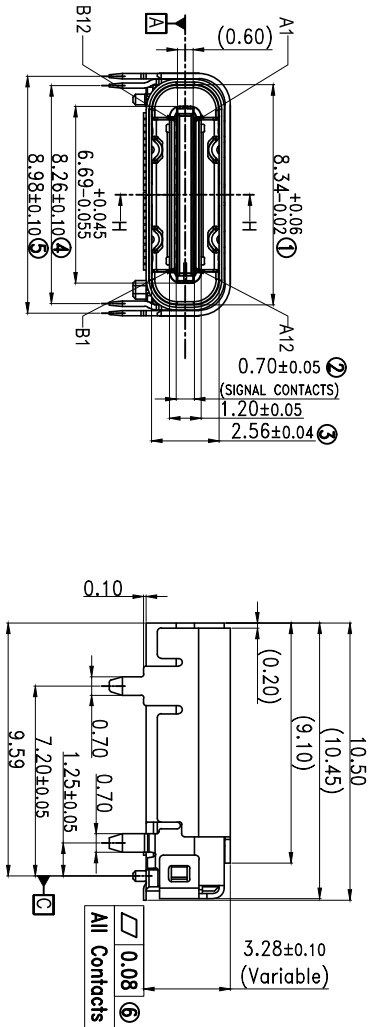

REVISIONS				APPROVED	
REV	DESCRIPTION	DATE			
X1	1605****	04/25/17	Tom		
NEW RELEASE					
Pin No	Signal Name	Mating Sequence	Pin No	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	TX1+	Second	B11	RX1+	Second
A3	TX1-	Second	B10	RX1-	Second
A4	Vbus	First	B9	Vbus	First
A5	CC1	Second	B8	SBU2	Second
A6	D+	Second	B7	D-	Second
A7	D-	Second	B6	D+	Second
A8	SBU1	Second	B5	CC2	Second
A9	Vbus	First	B4	Vbus	First
A10	RX2-	Second	B3	TX2-	Second
A11	RX2+	Second	B2	TX2+	Second
A12	GND	First	B1	GND	First
SHELL			SHELL		
GND			GND		

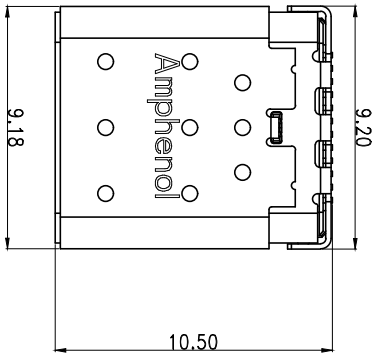

SECTION H-H

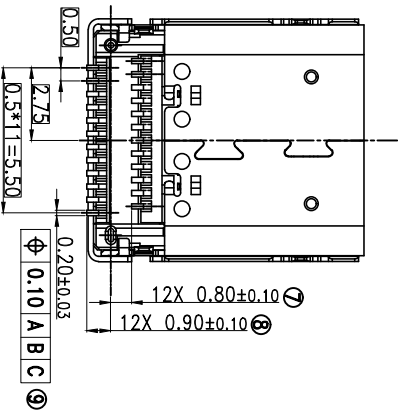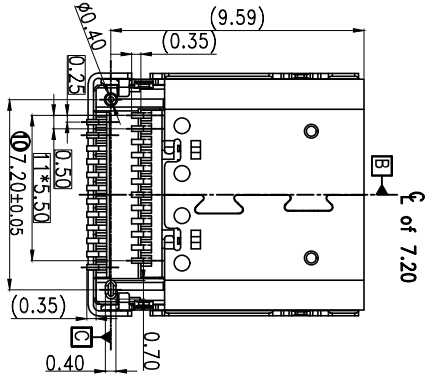


- Notes:
1. Material :
Contacts : copper alloy
Shell : Stainless steel.
Housing : High-temperature polymer UL94V-0, black.
2. Plating :
Contacts: contact area 30u" Au, Solder tail gold flash or matte tin, nickel overall.
Shell : Nickel Plating
3. Coplanarity : 0.08Max.
4. P/N : 12401722E#2A.
5. Packaging type: carrier tape.
6. Material should be fulfilled Amphenol spec# SSN002 AND Customer Requirements, for halogen free products, also need to meet SSN004

Amphenol

UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE	
TOLERANCES	U.S.	DRAWN	APPROVED	04/25/17	
METRIC		CHECKED	WATERMILL	04/25/17	
X	±0.20				
XX	±0.25				
XXX	±0.20				
ANGLES	±0.20				
FOR MATERIALS AND FINISHES					
SEE NOTES					
REMOVE SHARP EDGES					
DIMENSIONS					
U.S.					
MILLIMETERS					
(METRIC)					
ANGLE OF PROJECTION					
DRAWING FILE :					
TITLE					
USB TYPE C CONNECTOR RIGHT ANGLE DUAL					
ROW SMT(S=1.30mm)					
SIZE	DRAWING NO.				
A3	12401832E#02A				
SCALE	NONE				
SHEET 1 OF 2					REV. X1

SEE PAGE 1



BILL OF MATERIAL

ΚΩΤ ΣΜΙ(3-1.307111)

SCALE	NONE	3
-------	------	---