


### Q2L Series - 3.3x3.3 QFN

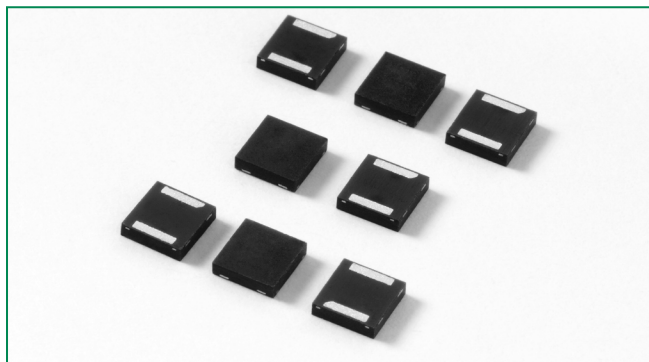

#### Agency Approvals

| Agency                                                                            | Agency File Number |
|-----------------------------------------------------------------------------------|--------------------|
|  | E133083            |

#### Pinout Designation

Not Applicable

#### Schematic Symbol



#### Description

Q2L Series 3.3x3.3 QFN are low capacitance SIDACtor® devices designed to protect high density broadband equipment from damaging overvoltage transients.

The series provides a low profile, chip scale surface mount solution that enables broadband equipment to comply with global regulatory standards while limiting the impact to broadband signals and board space.

#### Features and Benefits

- Low profile
- Small footprint
- Low capacitance
- Low voltage overshoot
- Low on-state voltage
- Does not degrade surge capability after multiple surge events within limit.
- Fails short circuit when surged in excess of ratings
- 2nd level interconnect is Pb-free per IPC/JEDEC J-STD-609A.01

#### Applicable Global Standards

- TIA-968-A
- TIA-968-B
- ITU K.20/21 Enhanced Level
- ITU K.20/21 Basic Level
- GR 1089 Intra-building
- IEC 61000-4-5
- YD/T 1082
- YD/T 993
- YD/T 950

#### Electrical Characteristics

| Part Number   | Marking | $V_{DRM}$<br>@ $I_{DRM} = 5\mu A$ | $V_S$<br>@ 100V/ $\mu s$ | $I_H$  | $I_S$  | $I_T$ | $V_T @ I_T = 2.2 \text{ Amps}$ | Capacitance<br>@ 1MHz, 2V bias |        |
|---------------|---------|-----------------------------------|--------------------------|--------|--------|-------|--------------------------------|--------------------------------|--------|
|               |         | V min                             | V max                    | mA min | mA max | A max | V max                          | pF min                         | pF max |
| P0080Q22CLRP  | P-8C    | 6                                 | 25                       | 50     | 800    | 2.2   | 5                              | 35                             | 75     |
| P0300Q22CLRP  | P03C    | 25                                | 40                       | 50     | 800    | 2.2   | 5                              | 25                             | 45     |
| P0640Q22CLRP  | P06C    | 58                                | 77                       | 150    | 800    | 2.2   | 5                              | 55                             | 85     |
| P0720Q22CLRP  | P07C    | 65                                | 88                       | 150    | 800    | 2.2   | 5                              | 50                             | 75     |
| P0900Q22CLRP  | P09C    | 75                                | 98                       | 150    | 800    | 2.2   | 5                              | 45                             | 70     |
| P1100Q22CLRP  | P11C    | 90                                | 130                      | 150    | 800    | 2.2   | 5                              | 45                             | 70     |
| P1300Q22CLRP  | P13C    | 120                               | 160                      | 150    | 800    | 2.2   | 5                              | 40                             | 60     |
| P1500Q22CLRP  | P15C    | 140                               | 180                      | 150    | 800    | 2.2   | 5                              | 35                             | 55     |
| P1800Q22CLRP  | P18C    | 170                               | 220                      | 150    | 800    | 2.2   | 5                              | 35                             | 50     |
| P2300Q22CLRP  | P23C    | 190                               | 260                      | 150    | 800    | 2.2   | 5                              | 30                             | 50     |
| P2600Q22CLRP  | P26C    | 220                               | 300                      | 150    | 800    | 2.2   | 5                              | 30                             | 45     |
| P3100Q22CLRP  | P31C    | 275                               | 350                      | 150    | 800    | 2.2   | 5                              | 30                             | 45     |
| P3500Q22CLRP  | P35C    | 320                               | 400                      | 150    | 800    | 2.2   | 5                              | 25                             | 40     |
| P4500Q22CLRP  | P45C    | 400                               | 530                      | 150    | 800    | 2.2   | 5                              | 25                             | 45     |
| P4600Q22CLRP* | P46C    | 425                               | 550                      | 150    | 800    | 2.2   | 5                              | 25                             | 45     |

Notes:  
 - Absolute maximum ratings measured at  $T_A = 25^\circ C$  (unless otherwise noted).  
 - Devices are bi-directional (unless otherwise noted).

### Surge Ratings

| Series | 2x10 <sup>1</sup><br>2x10 <sup>2</sup> | 8x20 <sup>1</sup><br>1.2x50 <sup>2</sup> | 10x160 <sup>1</sup><br>10x160 <sup>2</sup> | 10x560 <sup>1</sup><br>10x560 <sup>2</sup> | 10x1000 <sup>1</sup><br>10x1000 <sup>2</sup> | 5x310 <sup>1</sup><br>10x700 <sup>2</sup> | $I_{TSM}$<br>50/60 Hz | di/dt |
|--------|----------------------------------------|------------------------------------------|--------------------------------------------|--------------------------------------------|----------------------------------------------|-------------------------------------------|-----------------------|-------|
|        | A min                                  | A min                                    | A min                                      | A min                                      | A min                                        | A min                                     |                       |       |
| C      | 500                                    | 400                                      | 200                                        | 150                                        | 100                                          | 200 <sup>3</sup>                          | 30                    | 500   |

Notes:

1 Current waveform in  $\mu s$   
2 Voltage waveform in  $\mu s$


3 for surge rating of P4500Q22CLRP 10x700 $\mu s$  min=150A & typical=180A

- Peak pulse current rating ( $I_{PP}$ ) is repetitive and guaranteed for the life of the product.  
-  $I_{PP}$  ratings applicable over temperature range of -40°C to +85°C  
- The device must initially be in thermal equilibrium with -40°C  $\leq T_J \leq$  +150°C


### Thermal Considerations

| Package                                                                                            | Symbol          | Parameter                               | Value       | Unit |
|----------------------------------------------------------------------------------------------------|-----------------|-----------------------------------------|-------------|------|
| 3.3 x 3.3 QFN<br> | $T_J$           | Operating Junction Temperature Range    | -40 to +150 | °C   |
|                                                                                                    | $T_S$           | Storage Temperature Range               | -65 to +150 | °C   |
|                                                                                                    | $R_{\theta JA}$ | Thermal Resistance: Junction to Ambient | 120         | °C/W |


### V-I Characteristics

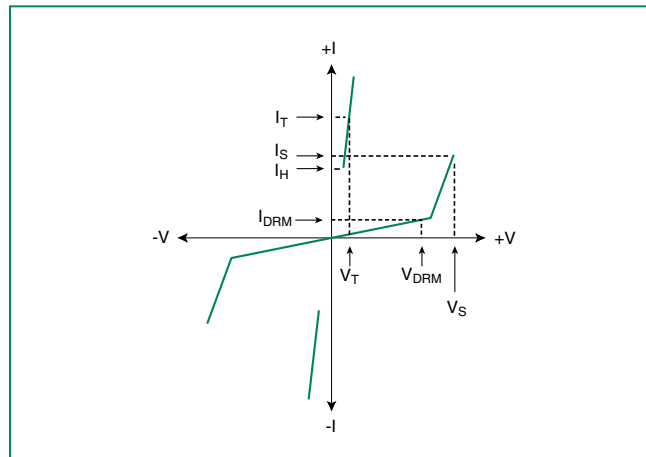


### $t_r \times t_d$ Pulse Waveform

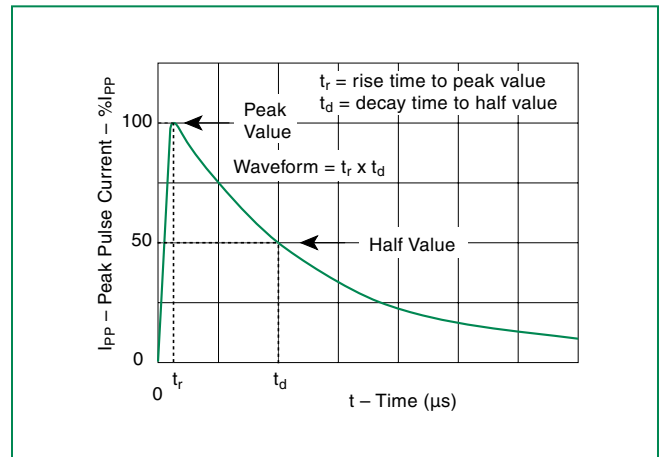

### Normalized $V_S$ Change vs. Junction Temperature

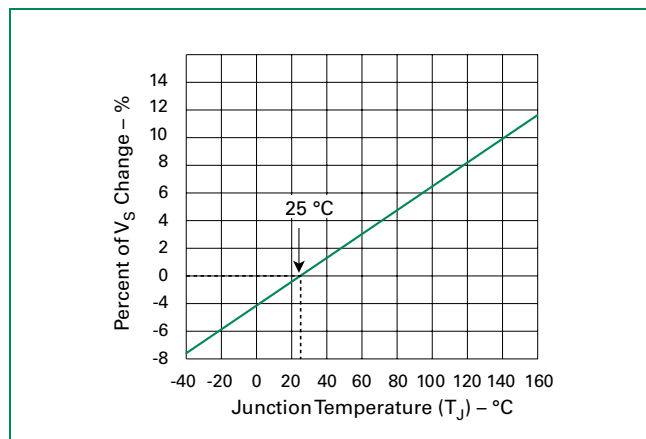


### Normalized DC Holding Current vs. Case Temperature

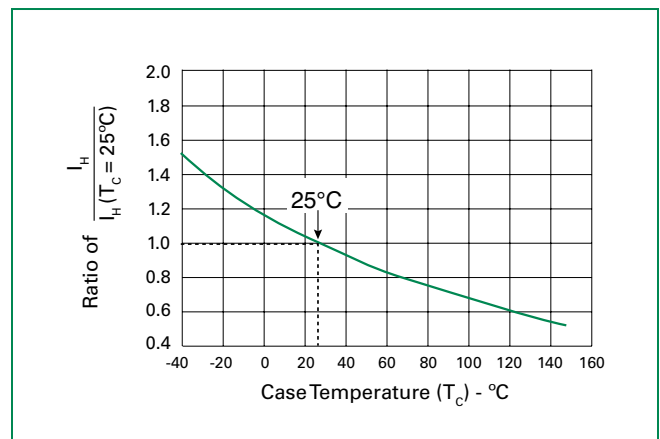

## Soldering Parameters

|                                                        |                                    |                               |
|--------------------------------------------------------|------------------------------------|-------------------------------|
| Reflow Condition                                       |                                    | Pb-Free assembly (see Fig. 1) |
| Pre Heat                                               | - Temperature Min ( $T_{s(min)}$ ) | +150°C                        |
|                                                        | - Temperature Max ( $T_{s(max)}$ ) | +200°C                        |
|                                                        | - Time (Min to Max) ( $t_s$ )      | 60-180 secs.                  |
| Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak) |                                    | 3°C/sec. Max.                 |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 3°C/sec. Max.                 |
| Reflow                                                 | - Temperature ( $T_L$ ) (Liquidus) | +217°C                        |
|                                                        | - Temperature ( $t_L$ )            | 60-150 secs.                  |
| Peak Temp ( $T_p$ )                                    |                                    | +260(+0/-5)°C                 |
| Time within 5°C of actual Peak Temp ( $t_p$ )          |                                    | 30 secs. Max.                 |
| Ramp-down Rate                                         |                                    | 6°C/sec. Max.                 |
| Time 25°C to Peak Temp ( $T_p$ )                       |                                    | 8 min. Max.                   |
| Do not exceed                                          |                                    | +260°C                        |

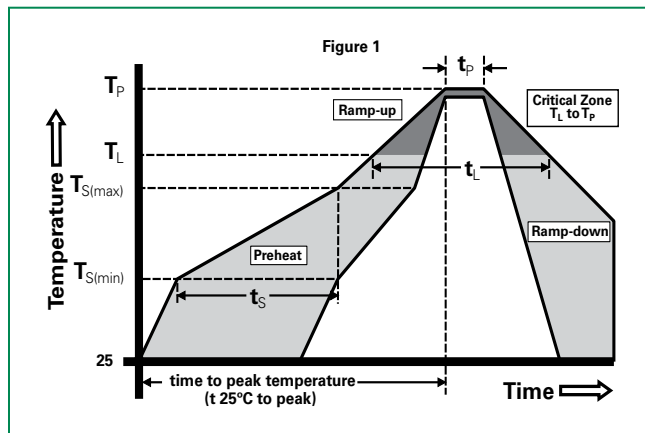

## Environmental Specifications

|                                   |                                                                                                                        |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------|
| <b>High Temp Voltage Blocking</b> | 80% Rated $V_{DRM}$ ( $V_{AC Peak}$ ) +125°C or +150°C, 504 or 1008 hrs. MIL-STD-750 (Method 1040) JEDEC, JESD22-A-101 |
| <b>Temp Cycling</b>               | -65°C to +150°C, 15 min. dwell, 10 up to 100 cycles. MIL-STD-750 (Method 1051) EIA/JEDEC, JESD22-A-104                 |
| <b>Biased Temp &amp; Humidity</b> | 52 $V_{DC}$ (+85°C) 85%RH, 504 up to 1008 hrs. EIA/JEDEC, JESD22-A-101                                                 |
| <b>High Temp Storage</b>          | +150°C 1008 hrs. MIL-STD-750 (Method 1031) JEDEC, JESD22-A-101                                                         |
| <b>Low Temp Storage</b>           | -65°C, 1008 hrs.                                                                                                       |
| <b>Thermal Shock</b>              | 0°C to +100°C, 5 min. dwell, 10 sec. transfer, 10 cycles. MIL-STD-750 (Method 1056) JEDEC, JESD22-A-106                |
| <b>Resistance to Solder Heat</b>  | +260°C, 30 secs. MIL-STD-750 (Method 2031)                                                                             |
| <b>Moisture Sensitivity Level</b> | 85%RH, +85°C, 168 hrs., 3 reflow cycles (+260°C Peak). JEDEC-J-STD-020, Level 1                                        |

## Physical Specifications

|                        |                                                               |
|------------------------|---------------------------------------------------------------|
| <b>Lead Material</b>   | Copper Alloy                                                  |
| <b>Terminal Finish</b> | 100% Matte-Tin Plated                                         |
| <b>Body Material</b>   | UL recognized epoxy meeting flammability classification 94V-0 |

## Additional Information



Datasheet




Resources




Samples

## Dimensions — 3.3x3.3 QFN

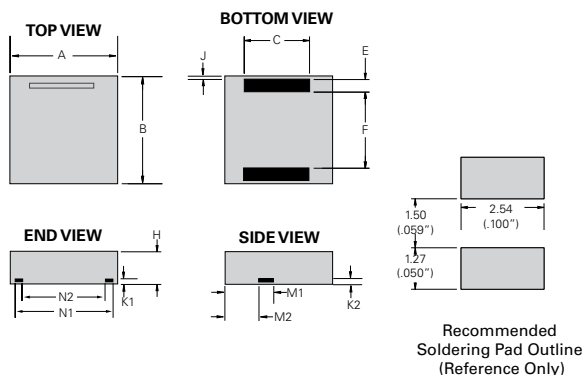


| Dimensions | Inches |       | Millimeters |       |
|------------|--------|-------|-------------|-------|
|            | Min    | Max   | Min         | Max   |
| A          | 0.126  | 0.134 | 3.200       | 3.400 |
| B          | 0.126  | 0.134 | 3.200       | 3.400 |
| C          | 0.075  | 0.083 | 1.900       | 2.100 |
| E          | 0.011  | 0.019 | 0.285       | 0.485 |
| F          | 0.088  | 0.096 | 2.230       | 2.430 |
| H          | 0.035  | 0.043 | 0.900       | 1.100 |
| J          | 0.000  | 0.008 | 0.000       | 0.200 |
| K1         | 0.004  | 0.012 | 0.100       | 0.300 |
| K2         | 0.004  | 0.012 | 0.100       | 0.300 |
| M1         | 0.063  | 0.071 | 1.610       | 1.810 |
| M2         | 0.045  | 0.053 | 1.153       | 1.353 |
| N1         | 0.095  | 0.103 | 2.420       | 2.620 |
| N2         | 0.082  | 0.090 | 2.080       | 2.280 |

## Part Numbering

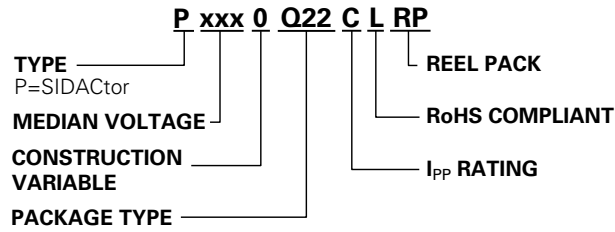

## Part Marking

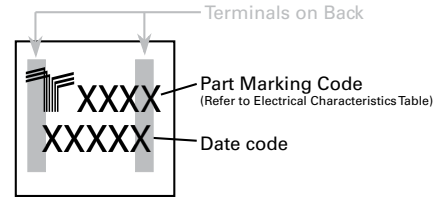


## Packing Options


| Package Type | Description                    | Quantity | Added Suffix | Industry Standard |
|--------------|--------------------------------|----------|--------------|-------------------|
| Q22          | 3.3x3.3 QFN Tape and Reel Pack | 5000     | RP           | EIA-481-D         |

## Tape and Reel Specifications — 3.3x3.3 QFN


### Reel Dimension

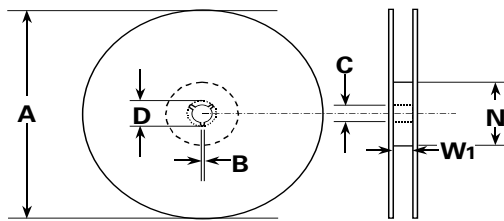

### Tape Leader and Trailer Dimensions

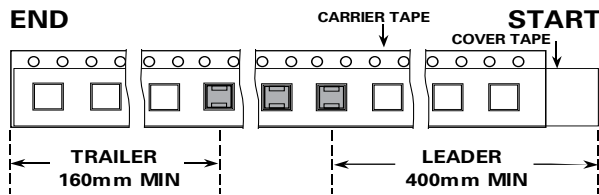

### Tape Dimension Items

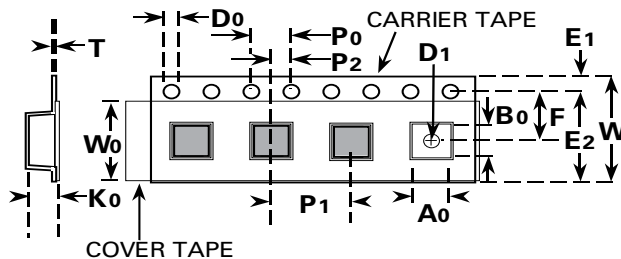

| Symbols        | Description                             | Inches |        | Millimeters |       |
|----------------|-----------------------------------------|--------|--------|-------------|-------|
|                |                                         | Min    | Max    | Min         | Max   |
| A              | Reel Diameter                           | N/A    | 12.992 | N/A         | 330.0 |
| B              | Drive Spoke Width                       | 0.059  | N/A    | 1.50        | N/A   |
| C              | Arbor Hole Diameter                     | 0.504  | 0.531  | 12.80       | 13.50 |
| D              | Drive Spoke Diameter                    | 0.795  | N/A    | 20.20       | N/A   |
| N              | Hub Diameter                            | 1.969  | N/A    | 50.00       | N/A   |
| W <sub>1</sub> | Reel Inner Width at Hub                 | 0.488  | 0.567  | 12.40       | 14.40 |
| A <sub>0</sub> | Pocket Width at Bottom                  | 0.138  | 0.146  | 3.50        | 3.70  |
| B <sub>0</sub> | Pocket Length at Bottom                 | 0.138  | 0.146  | 3.50        | 3.70  |
| D <sub>0</sub> | Feed Hole Diameter                      | 0.059  | 0.063  | 1.50        | 1.60  |
| D <sub>1</sub> | Pocket Hole Diameter                    | 0.059  | N/A    | 1.50        | N/A   |
| E <sub>1</sub> | Feed Hole Position 1                    | 0.065  | 0.073  | 1.65        | 1.85  |
| E <sub>2</sub> | Feed Hole Position 2                    | 0.400  | 0.408  | 10.15       | 10.35 |
| F              | Feed Hole Center - Pocket Hole Center 2 | 0.215  | 0.219  | 5.45        | 5.55  |
| K <sub>0</sub> | Pocket Depth                            | 0.039  | 0.051  | 1.00        | 1.30  |
| P <sub>0</sub> | Feed Hole Pitch                         | 0.153  | 0.161  | 3.90        | 4.10  |
| P <sub>1</sub> | Component Spacing                       | 0.311  | 0.319  | 7.90        | 8.10  |
| P <sub>2</sub> | Feed Hole Center - Pocket Hole Center 1 | 0.077  | 0.081  | 1.90        | 2.05  |
| T              | Carrier Tape Thickness                  | 0.010  | 0.014  | 0.25        | 0.35  |
| W              | Embossed Carrier Tape Width             | 0.453  | 0.484  | 11.50       | 12.30 |
| W <sub>0</sub> | Cover Tape Width                        | 0.358  | 0.366  | 9.10        | 9.30  |

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).